Since 1963

WAGMAN



FEATURED NEW PRODUCTS



POWERFUL & EFFICIENT TILT WALL CLEANING SYSTEM

- EASY TO USE
- 78% INCREASE IN WORK EFFICIENCY
- 100% MORE EFFECTIVE THAN TRADITIONAL EQUIPMENT

CONCRETE PRODUCTS FROM POUR TO POLISH

WWW.WAGMAN.US PHONE 717.854.2120



Passed the Sixty Year Mark.

Now that Wagman Metal has passed the sixty year mark, we're constantly striving to keep things fresh and new. We've been a leading supplier of power trowel replacement blades for over fifty two years, and thanks to my wonderful group of co- workers we're still at the top of the heap. Through hard work and constant attention to detail, my staff has managed to keep our loyal customer base supplied in a timely fashion with the quality concrete finishing products they have come to know and trust. I know founders George Wagman Sr. and Jr. would be proud.





My own experience started at WMP, back in 1980, and the years have taught me well. What this means for you, is an owner who is hands on and dedicated to bringing you the best quality finishing products at competitive prices with reliable service and inventory. After all, it's got my name on it. I will always stand behind the products we sell, I guarantee it!

Looking back reveals the innovation and ingenuity this company has brought to the flatwork industry. Wagman has lead the way over the years with new products like the *Gold Pro Blade ®*, the *Blue XL Blade ®*, and the entire line of *Poly Pro Blades*™. When the ride-on power trowel first started becoming popular, Wagman was one of the leaders to offer float pans – the highly popular Pro Float Pan™.



Our *Pro Tool ™* line has been a hallmark of ingenuity and alternative design from its earliest days. Ideas like T-slots and curved high screed walls have pioneered bull floats, hand floats, and our unique speed float. Our new line of hand trowels offers the hand finisher some of the highest quality tools at extremely competitive prices.



More recently we've pioneered the use of the power trowel for alternative uses. Our development of the *Revolution Rotary System ™*, has spawned a new era in trowel based floor clean up tools.



This development has also lead to our exciting new line of diamond polishing tools all run from your power trowel. The GHP System™ ushers in a new era in low cost diamond grind, hone, and polish capabilities.

"Wagman Metal Products is my life's work"
George F. Wagman III
President







Of course, I'd be remiss if I didn't finish with a nod to our Eco friendly chemical products that will help save you time and money. *Eco Coat ™*, and *Eco Crete ™* are designed to be your environmentally friendly partners in keeping your equipment clean, your forms from sticking and your clean-up chores easy.

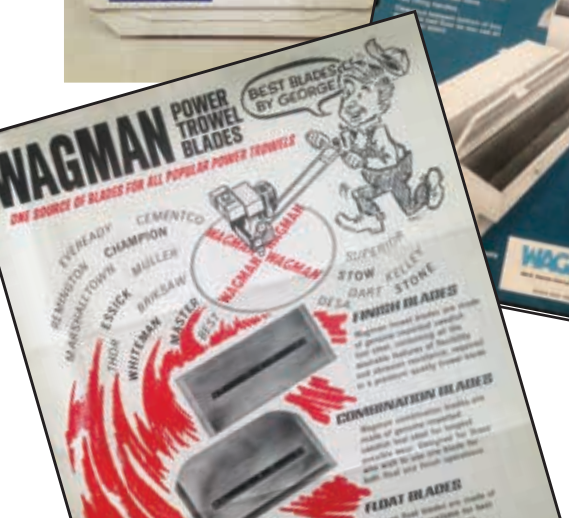

Wagman products are available from over 2000 contractor distributors worldwide, but if you can't find them in your local market, you can easily find them at *Wagman.us*. You'll always have access to the #1 line of power trowel replacement blades and accessories in the world!

Yours in Troweling,

George F. Wagman III

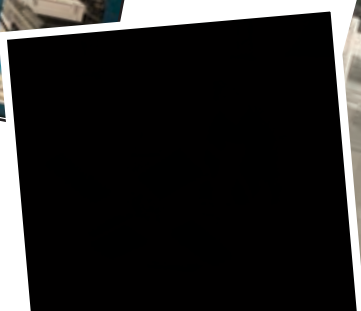



York Daily Record, Friday, March 1, 1974
Dallastown Firm Wins Top Award

Grinding, Honing and Polishing 

Types, Features, & Benefits of Trowel Blades 

Poly Trowel Blades 

Original Silver Trowel Blades 

Blue XL & Gold Pro Trowel Blades 

Trowel Blade Pictorial Reference 

Pro Float Pans® 

Pro Tools - Application/Placing Tools 

Pro Tools - Speed & Bull Floats 

Pro Tools - Brackets 

Pro Tools - Finishing Tools 

Pro Tools - Kneeboards, Brooms & Squeegees 

Eco Coat/Eco Crete, Chemicals 

Scrapers & Choppers 

Dual Pro Pumps 

Grinding, Honing, & Polishing

Turn your power trowel into a powerful scrubbing, stripping, and polishing machine.



US Patent
No. 7815393 and other
patents pending

Applications:

- Scrub-in penetrating sealers
- Remove residue from stain and dye applications
- Strip sealers
- Clean-up floors after tilt-up construction
- Power scrub old concrete clean
- Surface preparation
- Scrub casting beds and forms clean

*Not recommended for electric trowels

"Excellent System"



Dan Hill of Ace/Avant calls the Revolution Rotary System "an excellent system".

See video of Dan and others using the Revolution Rotary System at **www.Wagman.us**

Multi-Vortex Scrubbing Pattern:

Our patented bearing mounts allow the brushes to spin with the trowel's spider arm while revolving the opposite way on their own axis. This creates a Multi-Vortex planetary pattern that is ideal for scrubbing, stripping, polishing, and cleaning with even wear.



Grinding Stone Holder

Shown: GSHX-46 (For all WX style 46/48" walk-behind and clockwise rider rotors)



Patent Pending



Shown: GSH-46 w/ WGS-6SC
(Not for use on Wacker Neuson 2005 or newer models. See new GSHX model)

Wagman grinding stone holders are designed to temporarily convert power trowels into floor grinders. Not recommended for extended periods of use. Use wet.

Grinding stone holders bolt onto your power trowel like WX-style blades.

- ***Includes steel pressure lining to help prevent cracking stone***

Note: Use GSHX-36/46 for all Wacker Neuson models 2005 and newer.

Part #	Description	Weight
Grinding Stone Holder (Grinding stones must be purchased separately)		
GSHX-36	Wacker Neuson and WX style 36" trowels	4 lbs
GSHX-46	Wacker Neuson and WX style 46/48" trowels	5 lbs
GSHX-36L	For counterclockwise 36" rider rotor	4 lbs
GSHX-46L	For counterclockwise 46/48" rider rotor	5 lbs
GSH-36	WX style 36" power trowels (excluding Wacker 2005+)	4 lbs
GSH-46	WX style 46" power trowels (excluding Wacker 2005+)	5 lbs
Grinding Stones		
WGS-6SC	2" x 2" x 8" super coarse 6-grit grinding stone	3 lbs
WGS-10C	2" x 2" x 8" coarse 10-grit grinding stone	3 lbs
WGS-24M	2" x 2" x 8" medium 24-grit grinding stone	3 lbs
WGS-80F	2" x 2" x 8" fine 80-grit grinding stone	3 lbs

Revolution
ROTARY SYSTEM™

Choosing Your GHP System



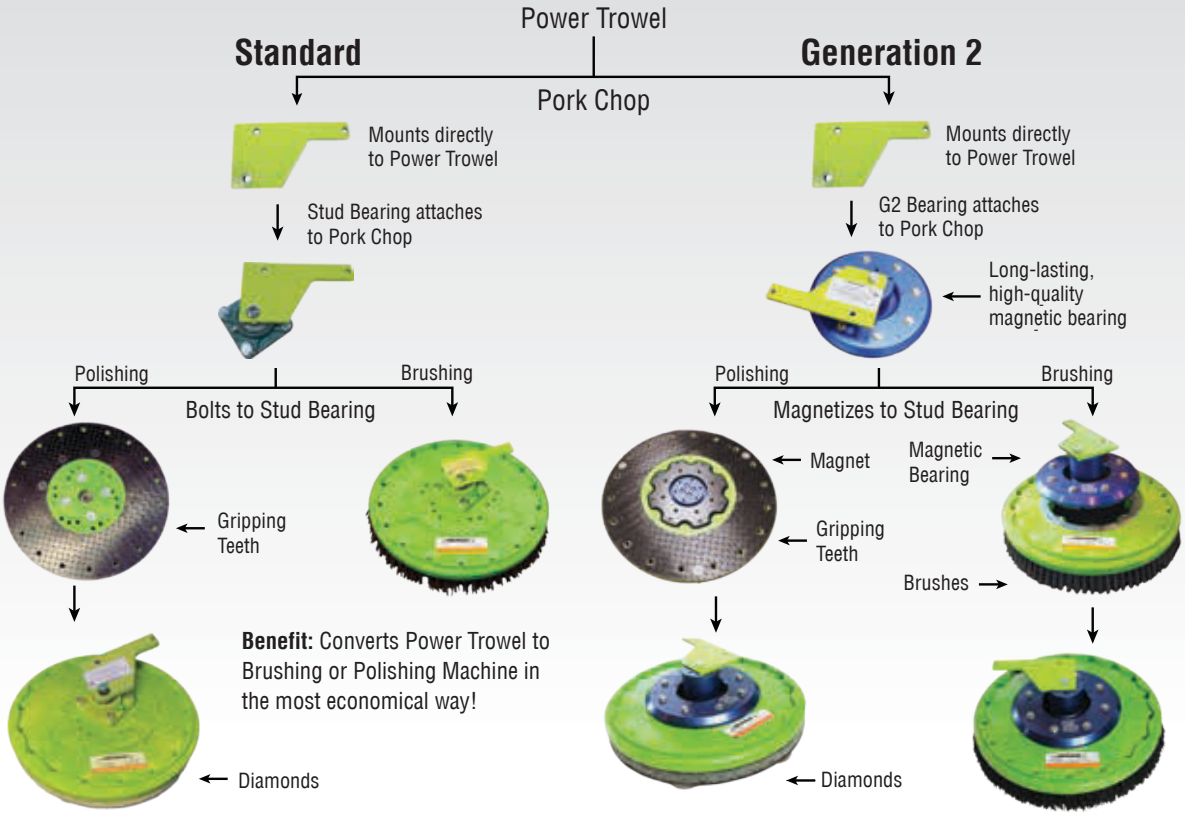

▸ **GHP Revolution System – Call 717-854-2120**

How to Order the GHP Bearing System

US Patent No. 7815393
and other patents pending

1 Revolution Rotary System Mounts

NOTE: One Rotary System mount per trowel arm



Shown: WRSXP-36

G1 Bearing System

24" Rotors	**WRSBP-24,** Plate bearing mount, fits 24" WB bolt-on style power trowels, 4 lbs. **WRSXP-24,** Plate bearing mount, fits 24" WX bolt-on style power trowels, 4 lbs.
30" Rotors	**WRSBP-30B,** Plate bearing mount, fits Wagman LP230 and MBW MK875 bolt-on style twin 30" riders, 4 lbs.
36" Rotors	**WRSXP-36,** Plate bearing ount, fits 36" WX bolt-on style power trowels, 4 lbs.
46"/48" Rotors	**WRSXP-46,** Plate bearing mount, fits 46/48" WX bolt-on style power trowels, 5 lbs. **WRSWP-48,** Plate bearing mount, fits bolt-on style MQ 12 arm 8' riders, 5 lbs.

2 Revolution Brushes

NOTE: All brushes are 14" and fit both 36" and 46/48" Rotary System mounts.
One brush per trowel arm

- *When in doubt of scratching, use a softer bristle.*

**Hydrochloric acid/muriatic acid may soften polymer brushes.*

WARNING: Do not use Wagman Rotary System with flammable materials.

			Common Uses: Can use on rider	Soiled smooth surface	Soiled rough surface	Impregnating sealer/ dust proofer (smooth surface)	Tilt-up concrete casting beds	Precast forms	Stains/dyes surface prep	Stains/dyes polishing	Stripping cure/sealer	Best used wet	Details
	***Ultra-Grit**** WRS-14-UG 5.6 lbs.	*.070" nylon impregnated w/46 grit silicon carbide*	*Comparable to a high productivity strip pad*	●	●	●			●			●	●	• *The most aggressive stripping brush* • *Ideal for heavily soiled concrete surfaces*
	***Nitro-Grit**** WRS-14-NG 5.6 lbs.	*.050" nylon impregnated w/ 80 grit silicon carbide*	*Comparable to a black or brown pad*	●	●	●		●	●	●		●	●	• *An aggressive grit brush* • *Used for stripping finishes from hard surfaces*
	***Virta-Grit**** WRS-14-VG 5.5 lbs.	*.035" nylon impregnated w/ 180 grit silicon carbide*	*Comparable to a blue or green pad*		●		●	●	●	●		●	●	• *Frequent cleaning of hard surfaces* • *Flexible for cleaning narrow joints and uneven surfaces*
	***Hydro-Scrub**** WRS-14-HS 5.9 lbs.	*.018" nylon impregnated w/ 500 grit silicon carbide*	*Comparable to a red pad*		●		●						●	• *Durable scrubbing brush* • *Minimal aggression on hard surfaces*
	***Wire*** WRS-14-WR 6.6 lbs.	*.014" steel wire*		●	●	●	●	●			●	●		• *Most often used on unfinished concrete floor* • *Variety of uses and economical* • *Steel wire will rust*
	***Mondo-Poly**** WRS-14-MP 5.6 lbs.	*.060" stiff polypropylene*		●	●	●							●	• *Wide variety of general scrubbing on smooth surfaces* • *Resistant to many chemicals*
	***Nylon**** WRS-14-NY 5.5 lbs.	*Extra stiff .028" bristles*			●		●						●	• *Wide variety of general scrubbing on smooth surfaces* • *Resistant to many chemicals*

Splash Guards

WRSSG-36, Fits 36" trowel, 3 lbs.
WRSSG-46, Fits 46" trowel, 4 lbs.
WRSSG-60, Fits twin 30" rider, 5 lbs.
WRSSG-72, Fits 6' rider trowel, 6 lbs.
WRSSG-92, Fits 8' rider trowel, 7 lbs.





How to Order the GHP G2 Bearing System

US Patent No. 7815393
and other patents pending

1 Revolution Rotary System Mounts

NOTE: One Rotary System Mount per Trowel arm

Shown: WRSXP-36G2



G2 Bearing System

G2 36" Rotors	**WRSXP-36G2,** Plate bearing mount, fits 36" WX bolt-on style power trowels, 4 lbs.
G2 46" Rotors	**WRSXP-46G2,** Plate bearing mount, fits 46/48" WX bolt-on style power trowels, 5 lbs.

2 Revolution Brushes

NOTE: All brushes are 14" and fit both 36" and 46/48" Rotary System mounts. One brush per trowel arm.

- *When in doubt of scratching, use a softer bristle.*

**Hydrochloric acid/muriatic acid may soften Polymer Brushes.*

WARNING: Do not use Wagman Rotary System with flammable materials.

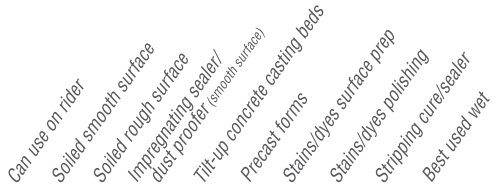

	**Nitro-Grit*** *WRS-14-G2NG* 4.8 lbs.	*.050" nylon impregnated w/ 80 grit silicon carbide*	*Comparable to a black or brown pad*	• *An aggressive grit brush* • *Used for stripping finishes from hard surfaces*
	**Wire** *WRS-14-G2WR* 6.1 lbs.	*.014" steel wire*		• *Most often used on unfinished concrete floor* • *Variety of uses and economical* • *Steel wire will rust*
	**Mondo-Poly*** *WRS-14-G2MP* 4.6 lbs.	*.060" stiff polypropylene*		• *Wide variety of general scrubbing on smooth surfaces* • *Resistant to many chemicals*
	**Nylon*** *WRS-14-G2NY* 4.7 lbs.	*Extra stiff .028" bristles*		• *Wide variety of general scrubbing on smooth surfaces* • *Resistant to many chemicals*

3 GHP Diamond System

NOTE: One pad driver and tooling per trowel arm

WARNING: Do not use Wagman Rotary System with flammable materials.

Diamond pads work with both generation drivers. Be sure to purchase the pad driver that goes with your mounting system!



Standard Pad Driver *WRS-14-PDM* 5 lbs.



G2 Pad Driver *WRS-14-PDM* 5 lbs.



Epoxy Removal *WRS-14-G2D0040ME* 3.6 lbs.



40 Grit *WRS-14-G2D0040M* 3.6 lbs.



50 Grit *WRS-14-G20050* 1.2 lbs.



70 Grit *WRS-14-G2D0070M* 3.6 lbs.



Black Dot Diamond Buffing Pad *WRS-14-G2DHDB* 1 lb.



100 Grit *WRS-14-G2D0100* 1.2 lbs.



150 Grit *WRS-14-G2D0150M* 6.1 lbs.



200 Grit *WRS-14-G2D0200* 1.2 lbs.



220 Grit *WRS-14-G2D0220M* 3.6 lbs.



Red Maintenance Pad *WRS-14-RED* 1 lb.



400 Grit *WRS-14-G2D0400* 1.2 lbs.



600 Grit *WRS-14-G2D0600* 1.2 lbs.



800 Grit *WRS-14-G2D0800* 1.2 lbs.



1800 Grit *WRS-14-G2D1800* 1.2 lbs.

Different Types of Power Trowel Blades

Float Blade



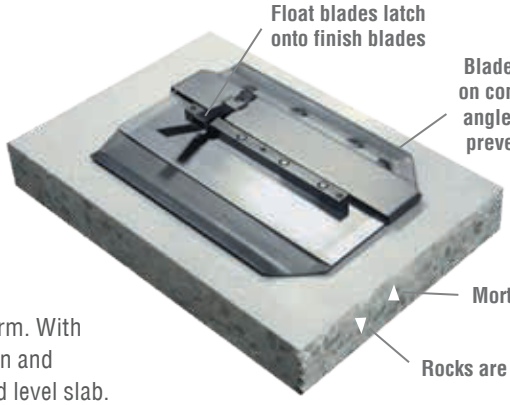

Designed to clip onto a finish blade, combination blade, bar, or a trowel arm. With the blade set in the flat position, high spots are broken down while suction and engine vibration bring mortar to the surface – all producing a uniform and level slab.

Finish Blade



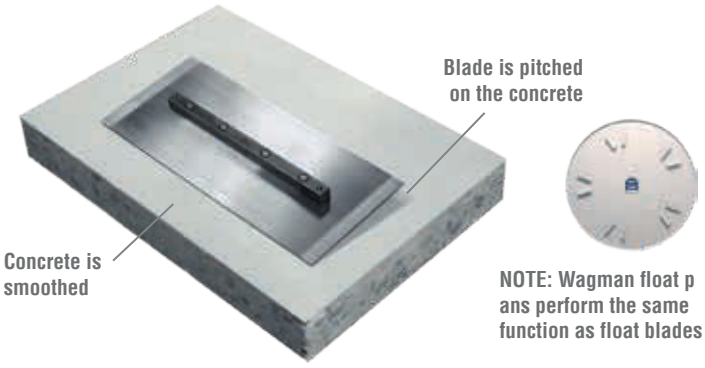

NOTE: Wagman float p ans perform the same function as float blades

Designed to produce a smooth or polished finish on concrete surfaces. After a slab has set up, trowel pitch is increased to a greater blade angle, resulting in a smooth or polished finish. Blade is reversible.

Combination Blade





Designed for those who wish to use one blade for both float and finish operations. Set in the flat position, the blade is used for floating, while a slight pitch produces a smooth or a polished finish.

Online Trowel Fitting Guide

The Wagman Online Fitting Guide will help you easily see all of the trowel blades and pans that fit your machine.

Choose the make and model of your equipment for a list of what fits your trowel.

Visit www.Wagman.us for the interactive fitting guide.

To order, call: 800-233-9461 or 717-854-2120

Key Features and Benefits of Wagman Trowel Blades

Benefits of Wagman Blades

- Flatter floors
- Reduces trowel marks
- Less wobble
- Less wear and tear on equipment
- No blade separation
- Maximum performance and life
- Confidence in fit
- Fewer returns
- Professional results



1 Torque Flex Steel

Wagman torque flex steel is specially formulated to provide the most wear-resistant high-performance power trowel blade available. We give you more options with three different performance levels for a variety of needs.



2 Rivet System

Wagman rivets are precisely sized and pressed to securely attach the mounting bar to the blade, preventing separation.



3 Mounting Brackets

Wagman's mounting brackets are made on a state-of-the-art bar system ensuring every blade fits your power trowel the same.



4 Tapped Holes

Holes are tapped with precision to provide the best possible fit to the power trowel.

5 Consistent Quality

From raw materials to finished product, Wagman trowel blades are made to provide the most balanced wearing blade possible.

6 Precise Bend

Through field testing, Wagman has determined the precise degree of bend for maximum performance.

Poly Pro

US Patent No. 7,059,801



The WAGMAN Poly Pro steel reinforced Poly trowel blade eliminates the risk of leaving dark burnish marks while power troweling concrete or epoxy.

The steel backing adds rigidity to the poly material, provides a harder finish, and allows the blade to be used on walk-behind and ride-on power trowels.

- Use finish-style for hardest finish
- Poly Blades proven to last as long, in most cases longer, than steel blades
- Specially formulated abrasion-resistant Poly
- Stiffer than previous Poly blades
- Provides a hard finish
- Available in finish and combination blade styles
- Not recommended for use with float pans

Basis for CSI's 2010 Construction Technology Award

Why Use Wagman Poly Blades?

Designed for:

Ride-on Trowels

Walk-behind Trowels



Steel Blades

Finishing with steel power trowel blades can leave undesirable dark burnish marks which discolor the floor.

Above *A steel blade was used to finish light reflective concrete. (Notice the darkness created by the steel blade.)*

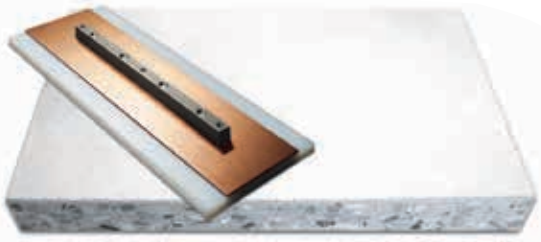

Wagman Poly Blades

Wagman Poly blades allow you to control dark burnish marks on concrete or epoxy when power troweling.

Above *The Wagman Poly Pro blade produces a hard burnish-mark-free finish on light reflective concrete.*

Wagman Poly Pro Fitting Guide

Power Trowel Manufacturer	Wagman Part #	Blade Size (in inches)	Blade Type	Blades Per Ctn.	Weight Per Ctn. lbs.
For Use On Ride-on and Walk-behind Power Trowels					
30" Dia. Allen, Bartell (Not Edger)	**WB-6105 SRP**	6 x 10-1/2	Finish (steel reinforced Poly)	4	12
	WB-81050 SRP	8 x 10-1/2	Combination (steel reinforced Poly)	4	12
36" Dia. Allen, Bartell, Champion, Dart, ESI, Essick, Kelley, MBW, Marshalltown, Morrison, Muller, Oscar, Rhin-O-Tuff, Toro / Stone, Stow (new style), Wacker, Whiteman	**WX-614 SRP**	6 x 14	Finish (steel reinforced Poly)	4	15
	WX-814 SRP	8 x 14	Finish (8" with round corners, steel reinforced Poly)	4	17
	WX-8140 SRP	8 x 14	Combination (steel reinforced Poly)	4	16
	WX-1014 FOSRP	10 x 14	Float (steel float blade, no Poly)	4	19
36 Dia. Allen Edging Trowels, Rhin-O-Tuff Edging Trowels	**WX-614FE SRP**	6 x 14	Finish (opposite corners cut)	4	15
	WX-614FEL SRP	6 x 14	Finish (counter clockwise rotor on rider)	4	15
46" - 48" Dia. Allen, Bartell, Champion, Dart, ESI, Essick, Kelley, MBW, Marshalltown, Morrison, Muller, Oscar, Rhin-O-Tuff, Toro / Stone, Stow (new style), Wacker, Whiteman	**WX-618 SRP**	6 x 18	Finish (steel reinforced Poly)	4	20
	WX-818 SRP	8 x 18	Finish (8" with round corners, steel reinforced Poly)	4	22
	WX-8180 SRP	8 x 18	Combination (Steel reinforced Poly)	4	21
	WX-1018 HDSRP	10 x 18	Float (steel float blade, no Poly)	4	28
48" Dia. Whiteman HTXD6i, HTXG6DF, HTX6H (12-bladed rider)	**WW-616 SRP**	6 x 16	Finish (steel reinforced Poly)	4	18
60" Dia. Allen, Wacker CRT-60, Whiteman STX, STH	**WX-623 SRP**	6 x 23	Finish (steel reinforced Poly)	4	26
44" Dia. Boren Super Trowel, Husqvarna Superior	**WF-616 SRP**	6 x 16	Finish (steel reinforced Poly)	4	18
46" Dia. Allen 442, Pro1050, HDX	**WX-616 SRP**	6 x 16	Finish (steel reinforced Poly)	4	18

Poly Blades

The combination-style UHMW blades are Poly power trowel blades made to float and finish any application where leaving burnish marks is a concern.

UHMW blades are designed for use on walk-behind power trowels only.

- Specially formulated abrasion–resistant Poly
- Blade life comparable to steel blades
- Control dark burnish marks
- Available to fit most popular power trowels
- Not recommended for use with float pans





No More Burnish Marks!

While finishing a floor, no matter how long or how fast you run Wagman's Poly trowel blades, they will not leave black burnish marks! You can now power trowel exposed or decorative floors that once required hand troweling for a burnish-free finish.

Highly Polished Troweled Finish

In the past, there were few methods to achieve a bright polished exposed concrete floor. Wagman's Poly blades control dark burnish marks. Use on all floors to be exposed or to receive: stain, dye, shake-on hardener, integral pigments, and especially those to be polished.

Wagman & UHMW Poly Blade Fitting Guide

Power Trowel Manufacturer	Wagman Part #	Blade Size (in inches)	Blade Type	Blades Per Ctn.	Weight / Ctn. lbs.
For Use On Walk-behind Power Trowels Only					
24" Dia. Allen, MBW F24/4, Terex/Bartell B424	**WB-47590 UHMW**	4-3/4 x 9	Combination (Poly)	4	6
24" Dia. Toro / Stone CF24E	**WO-47590 UHMW**	4-3/4 x 9	Combination (Poly)	4	6
24" Dia. Oscar, Wacker	**WA-47590M6 UHMW**	4-3/4 x 9	Combination (Poly)	4	6
24" Dia. Whiteman	**WX-5925M6 UHMW**	5 x 9-1/4	Combination (Poly)	4	7
30" Dia. Allen, Bartell (Not Edger)	**WB-81050 UHMW**	8 x 10-1/2	Combination (Poly)	4	9
30" Dia. Whiteman	**WW-611 UHMW**	6 x 11	Finish (Poly)	4	8
36" - 48" Dia. Allen, Bartell, Champion, Dart, Kelley, MBW, M-Town, Morrison, Muller, Oscar, Rhin-O-Tuff, Toro / Stone, Stow (new style), Wacker, Whiteman	**WX-8140 UHMW**	8 x 14	Combination (Poly)	4	10
	WX-8180 UHMW	8 x 18	Combination (Poly)	4	14
36" Dia. Husqvarna, Superior	**WF-8140 UHMW**	8 x 14	Combination (Poly)	4	11
44" Dia. Boren Super Trowel, Husqvarna, Superior, Essick	**WF-8160 UHMW**	8 x 16	Combination (Poly)	4	15

Original Silver

The Wagman Original Silver blade was developed using ASW 80 CR2 Torque Flex Steel, the longest lasting proprietary alloy tool steel available.

Wagman's heavy-duty construction makes it the most consistent wearing and longest lasting silver blade available.

- For use on walk-behind and ride-on power trowels
- Silver polished blade gives maximum flex to ensure a smooth, chatter-free finish
- Available in finish and combination blade types
- Full line of float blades also available



Wagman relative trowel blade thickness:



Designed for:

Ride-on Trowels

Walk-behind Trowels

Wagman Original Silver Blade Fitting Guide

Manufacturer	Machine Model #	Manufacturer Part#	Wagman Part #	Blade Size (in inches)	Blade Type	Blades Per Ctn.	Wt. Per Ctn. lbs.
ALLEN RAZORBACK	**Walk-Behind**						
	VP424 Edging Walker	na	**WB-47590**	4-3/4 x 9	Combination	4	5
		na	**WB-47590M6**	4-3/4 x 9	Combination, metric	4	5
	430 Edging Walker	028388	**WB-81050**	8 x 10-1/2	Combination	4	11
		na	**WX-1011FO**	10 x 11	Float	4	16
		028387	**WB-6105F**	6 x 10-1/2	Finish	4	8
	436 Edging Walker	041695	**WX-614FE**	6 x 14	Finish (opposite corners have 2" radius)	4	11
		016095	**WX-8140**	8 x 14	Combination	4	14
	436, VP436	015890	**WX-614F**	6 x 14	Finish	4	11
		028779	**WX-814F**	8 x 14	Finish (8" flat finish with round corners)	4	15
		016095	**WX-8140**	8 x 14	Combination	4	14
		02822314	**WX-1014FO**	10 x 14	Float	4	21
		033271	**WMB-1400**	–	7/8" adapter bar for channel blades	–	1.8 ea.
		033866	**WM-61325CH**	6 x 13-1/4	Finish (7/8" channel)	4	9
		033867	**WM-8140CH**	8 x 14	Combination (7/8" channel)	4	12
	442	034421	**WX-616F**	6 x 16	Finish	4	12
		034422	**WX-8160**	8 x 16	Combination	4	18
		na	**WX-1016HD**	10 x 16	Float	4	27
		na	**WMB-1600**	–	7/8" adapter bar For channel blades	–	2.0 ea.
		na	**WM-616CH**	6 x 16	Finish (7/8" channel)	4	10
		na	**WM-8160CH**	8 x 16	Combination (7/8" channel)	4	14
	446, VP446	015695	**WX-618F**	6 x 18	Finish	4	14
		028489	**WX-818F**	8 x 18	Finish (8" flat finish with round corners)	4	18
		016094	**WX-8180**	8 x 18	Combination	4	19
		02822318	**WX-1018HD**	10 x 18	Float	4	30
		028215	**WMB-1800**	–	7/8" adapter bar for channel blades	–	2.2 ea.
		033566	**WM-618CH**	6 x 18	Finish (7/8" channel)	4	11
		033565	**WM-8180CH**	8 x 18	Combination (7/8" channel)	4	15
	Ride-On						
	MP225 Edger / MP235 Edger / Pro 900 Edger	016095	**WX-8140**	8 x 14	Combination	4	14
		041695	**WX-614FE**	6 x 14	Finish (opposite corners have 2" radius)	4	11
		041695	**WX-614FEL**	6 x 14	Finish (left handed version of above) (counter clockwise rotor on rider)	4	11

Wagman Original Silver Blade Fitting Guide

Manufacturer	Machine Model #	Manufacturer Part#	Wagman Part #	Blade Size (in inches)	Blade Type	Blades Per Ctn.	Wt. Per Ctn. lbs.
ALLEN Continued	MP205 / MP215 / Pro 900	015890	**WX-614F**	8 x 14	Finish	4	11
		028779	**WX-814F**	8 x 14	Finish (8" flat finish with round corners)	4	15
		016095	**WX-8140**	8 x 14	Combination	4	14
		02822314	**WX-1014FO**	10 x 14	Float	4	21
		02822614	**WX-1014LH**	10 x 14	Float (left handed)	4	21
		033271	**WMB-1400**	-	7/8" adapter bar for channel blades	-	1.8 ea.
		033866	**WM-61325CH**	6 x 13-1/4	Finish (7/8" channel)	4	9
		033867	**WM-8140CH**	8 x 14	Combination (7/8" channel)	4	12
	Pro 1050	034421	**WX-616F**	6 x 16	Finish	4	12
		034422	**WX-8160**	8 x 16	Combination	4	18
		na	**WX-1016HD**	10 x 16	Float	4	27
		na	**WMB-1600**	–	7/8" adapter bar for channel blades	–	2.0 ea.
		na	**WM-616CH**	6 x 16	Finish (7/8" channel)	4	10
		na	**WM-8160CH**	8 x 16	Combination (7/8" channel)	4	14
	HDX Series HDX600 / HDX605	065204V	**WX-616F**	6 x 16	Finish (flat)	4	11
		060542	**WX-8160**	8 x 16	Combination	4	18
	HD530 / HDX600 / HP100 / HP1200 MP305 / MP315 / MSP415 / MSP430 MSP425 / MSP435 / MSP440 MSP445 / MSP450 / MSP455 MSP460 / MSP470 / Super Pro 400 Super Pro 425 / Super Pro 450	015695	**WX-618F**	6 x 18	Finish	4	14
		028489	**WX-818F**	8 x 18	Finish (8" flat finish with round corners)	4	18
		016094	**WX-8180**	8 x 18	Combination	4	19
		02822318	**WX-1018HD**	10 x 18	Float	4	30
		02822618	**WX-1018LH HD**	10 x 18	Float (left handed)	4	30
		028215	**WMB-1800**	–	7/8" adapter bar for channel blades	–	2.2 ea.
		033566	**WM-618CH**	6 x 18	Finish (7/8" channel)	4	11
		033565	**WM-8180CH**	8 x 18	Combination (7/8" channel)	4	15
	HD550 / Super Pro 500 Super Pro 550 / HD560 HDX740 / 750 / 760 / 780 / HP205	039831	**WX-623F**	6 x 23	Finish	4	19
		039846	**WX-8230**	8 x 23	Combination	4	24
		na	**WX-823F**	8 x 23	Finish (8" flat finish with round corners)	4	24
BARTELL	**Walk-Behind**						
	B424 (4 blade)	20455	**WB-47590**	4-3/4 x 9	Combination	4	5
	B530 / B430 Edger	20407	**WB-4751050 M6**	4-3/4 x 10-1/2	Combination, metric	4	5
	B624 (6 blade)	11649	**WB-4800**	4 x 8	Combination	4	5
	B430 (Not Edger)	10400	**WB-6105F**	6 x 10-1/2	Finish	4	8
		20419	**WB-81050**	8 x 10-1/2	Combination	4	11
		20406	**WX-1011FO**	10 x 11	Float	4	16
	B336 / B436 / B436SD	20414	**WX-614F**	6 x 14	Finish	4	11
		na	**WX-614F FLAT**	6 x 14	Finish (flat)	4	11
		na	**WX-814F**	8 x 14	Finish (8" flat finish with round corners)	4	15
		20479	**WX-8140**	8 x 14	Combination	4	14
		20415	**WX-1014FO**	10 x 14	Float	4	21
	B446	20410	**WX-618F**	6 x 18	Finish	4	14
		na	**WX-618F FLAT**	6 x 18	Finish (flat)	4	14
		na	**WX-818F**	8 x 18	Finish (8" flat finish with round corners)	4	18
		20480	**WX-8180**	8 x 18	Combination	4	19
		20411	**WX-1018HD**	10 x 18	Float	4	30
	Ride-On						
	TS65 / TS74 / TS78 / BRX836	20414	**WX-614F**	6 x 14	Finish	4	11
		na	**WX-614F FLAT**	6 x 14	Finish (flat)	4	11
		20479	**WX-8140**	8 x 14	Combination	4	14
		20415	**WX-1014FO**	10 x 14	Float	4	21
		20418	**WX-1014LH**	10 x 14	Float (left handed)	4	21
	DPS96 / TS88 / TS96 / TS100 / BTR88 / HS90 / LP95 / LD98	20410	**WX-618F**	6 x 18	Finish	4	14
		na	**WX-618F FLAT**	6 x 18	Finish (flat)	4	14
		20480	**WX-8180**	8 x 18	Combination	4	19
		20411	**WX-1018HD**	10 x 18	Float	4	30
		20404	**WX-1018LH HD**	10 x 18	Float (left handed)	4	30
BOREN SUPER TROWEL	**Walk-Behind**						
	36" Dia.	na	**WF-81250**	8 x 12-1/2	Combination (for use with WFP-39 float pan)	4	15
	44" Dia.	na	**WF-616F**	6 x 16	Finish	4	12
		na	**WF-816F**	8 x 16	Finish (8" flat finish with round corners)	4	19
		na	**WF-8160**	8 x 16	Combination	4	18
		na	**WF-105175FO**	10-1/2 x 17-1/2	Float (for use with WF-8160 only)	4	24
	48" Dia.	na	**WF-618F**	6 x 18	Finish	4	14
		na	**WF-818F**	8 x 18	Finish (8" flat finish with round corners)	4	21
		na	**WF-8180**	8 x 18	Combination	4	20
		na	**WX-1018HD**	10 x 18	Float (for use with WF-618 only)	4	30
		na	**WF-105195FO**	10-1/2 x 19-1/2	Float (for use with WF-8180 only)	4	28
	Ride-On						
	40hp Ride-on HD	na	**WF-616F**	6 x 16	Finish	4	12
		na	**WF-816F**	8 x 16	Finish (8" flat finish with round corners)	4	19
		na	**WF-8160**	8 x 16	Combination	4	18
CHAMPION DESA CORBIT NORTHRUP CEMENTCO WESTERN	**Walk-Behind**						
	36" Dia.	na	**WX-614F**	6 x 14	Finish	4	11
		na	**WX-614F FLAT**	6 x 14	Finish (flat)	4	11
		na	**WX-8140**	8 x 14	Combination	4	14
		na	**WX-1014FO**	10 x 14	Float	4	21
	46" Dia.	na	**WX-618F**	6 x 18	Finish	4	14
		na	**WX-618F FLAT**	6 x 18	Finish (flat)	4	14
		na	**WX-8180**	8 x 18	Combination	4	19
		na	**WX-1018HD**	10 x 18	Float	4	30
CLIPPER CHALLENGE EVEREADY BRIKSAW	**Walk-Behind**						
	F3434	5530065	**WX-614F**	6 x 14	Finish	4	11
		5530064	**WX-8140**	8 x 14	Combination	4	14
		5530066	**WX-1014FO**	10 x 14	Float	4	21
	F4434	5530068	**WX-618F**	6 x 18	Finish	4	14
		5530067	**WX-8180**	8 x 18	Combination	4	19
		5530069	**WX-1018HD**	10 x 18	Float	4	30

Wagman Original Silver Blade Fitting Guide Continued

Manufacturer	Machine Model #	Manufacturer Part#	Wagman Part #	Blade Size (in inches)	Blade Type	Blades Per Ctn.	Wt. Per Ctn. lbs.
DART	▾ Walk-Behind						
	DTF36	DT-7082	**WX-614F**	6 x 14	Finish	4	11
		DT-7083	**WM-61325CH**	6 x 13-1/4	Finish (7/8" channel)	4	9
		DT-7080	**WX-8140**	8 x 14	Combination	4	14
		DT-7081	**WM-8140CH**	8 x 14	Combination (7/8" channel)	4	12
	DTF46	DT-7087	**WX-618F**	6 x 18	Finish	4	14
		DT-7088	**WM-618CH**	6 x 18	Finish (7/8" channel)	4	11
		DT-7086	**WX-8180**	8 x 18	Combination	4	19
		DT-7085	**WM-8180CH**	8 x 18	Combination (7/8" channel)	4	15
		DT-7089	**WX-1018HD**	10 x 18	Float	4	30
EDCO (INGERSOLL RAND)	▾ Walk-Behind						
	30" / T304 (Bolt-on style)	40270-C	**WW-8110**	8 x 10-1/2	Combination	4	10
	36" / T364 (Bolt-on style)	40040-C	**WX-8140**	8 x 14	Combination	4	14
		40050-C	**WX-614F**	6 x 14	Flnish	4	11
		40060-C	**WX-1014FO**	10 x 14	Float	4	21
	46" / T464 (Bolt-on style)	40070-C	**WX-8180**	8 x 18	Combination	4	19
		40080-C	**WX-618F**	6 x 18	Finish	4	14
		40090-C	**WX-1018HD**	10 x 18	Float	4	30
	28"-30" / WT30 (Quick release spring)	F-2, 40280	**WED-611**	6 x 11	Finish (2" channel)	4	10
		C-2, 40270	**WED-8110**	8 x 11	Combination (2" channel)	4	13
		M-2, 40290	**WED-1011**	10 x 11	Float (2" channel)	4	18
	34" - 42" / WT36 (Quick release spring)	F-1, 40050	**WED-614**	6 x 13-1/2	Finish (2" channel)	4	11
		C-1, 40040	**WED-8140**	8 x 13-1/2	Combination (2" channel)	4	15
		M-1, 40060	**WED-1014**	10 x 14	Float (2" channel)	4	20
	44" - 48" / WT46 (Quick release spring)	F-3, 40080	**WED-618**	6 x 18	Finish (2" channel)	4	16
		C-3, 40070	**WED-8180**	8 x 18	Combination (2" channel)	4	21
		M-3, 40090	**WED-1018**	10 x 18	Float (2" channel)	4	28
	"A" Adapter for 28" - 42" Trowels	A	**WED-01A**	na	Edco "A" Adapter (fasteners included)	–	1.75 ea.
	"B" Adapter for 44" - 48" Trowels	B	**WED-02B**	na	Edco "B" Adapter (fasteners included)	–	2.5 ea.
ESI	▾ Walk-Behind *Ride-On						
	EET60H	na	**WB-47590**	4-3/4 x 9	Combination	4	5
		na	**WB-47590 M6**	4-3/4 x 9	Combination, metric	4	5
	EET75H	na	**WB-4751050 M6**	4-3/4 x 10-1/2	Combination, metric	4	5
	EWT90 *ERT2X90H	na	**WX-614F**	6 x 14	Finish	4	11
		na	**WX-614F FLAT**	6 x 14	Finish (flat)	4	11
		na	**WX-814F**	8 x 14	Finish (8" flat finish with round corners)	4	15
		na	**WX-8140**	8 x 14	Combination	4	14
		na	**WX-1014FO**	10 x 14	Float	4	21
	EWT120 *ERT2X120	na	**WX-618F**	6 x 18	Finish	4	14
		na	**WX-618F FLAT**	6 x 18	Finish (flat)	4	14
		na	**WX-818F**	8 x 18	Finish (8" flat finish with round corners)	4	18
		na	**WX-818O**	8 x 18	Combination	4	19
		na	**WX-1018HD**	10 x 18	Float	4	30
ESSICK	▾ Walk-Behind						
	LB3434	LB34-120	**WX-614F**	6 x 14	Finish	4	11
		LB34-120	**WX-614F FLAT**	6 x 14	Finish (flat)	4	11
		LB34-107	**WX-8140**	8 x 14	Combination	4	14
		LB34-121	**WX-1014FO**	10 x 14	Float	4	21
	CF44 / VCF443	CF44-107	**WF-8160**	8 x 16	Combination	4	18
	LB4634 / HB463	LB46-120	**WX-618F**	6 x 18	Finish	4	14
		LB46-120	**WX-618F FLAT**	6 x 18	Finish (flat)	4	14
		LB46-107	**WX-8180**	8 x 18	Combination	4	19
		LB46-121	**WX-1018HD**	10 x 18	Float	4	30
GOLDBLATT (SKIL) (WHITE)	▾ Walk-Behind						
	PT448	19214	**WX-618F**	6 x 18	Finish	4	14
		19215	**WX-8180**	8 x 18	Combination	4	19
		19105	**WX-1018HD**	10 x 18	Float	4	30
HUSQVARNA (SOFT CUT) (SUPERIOR)	▾ Walk-Behind						
	TR36	2836F	**WF-614F**	6 x 14	Finish	4	12
		3010	**WX-8140**	8 x 14	Combination	4	14
		2836FL	**WF-8140**	8 x 14	Combination	4	16
		na	**WX-1014FO**	10 x 14	Float (for use with WF-614 only)	4	21
	EX36 / GH36 / DGH36 / CR36	2836F	**WF-614F**	6 x 14	Finish	4	12
		2836C	**WF-814F**	8 x 14	Finish (8" flat finish with round corners)	4	16
		2836FL	**WF-8140**	8 x 14	Combination	4	16
		na	**WX-1014FO**	10 x 14	Float (for use with WF-614 only)	4	21
		na	**WF-105155FO**	10-1/2 x 15-1/2	Float (for use with WF-8140 only)	4	21
	TR48	2848F	**WF-618F**	6 x 18	Finish	4	14
		4002	**WX-8180**	8 x 18	Combination	4	19
		2848FL	**WF-8180**	8 x 18	Combination	4	20
		na	**WX-1018HD**	10 x 18	Float (for use with WF-618 only)	4	30
	GH44 / DGH44 / CR44	2744F	**WF-616F**	6 x 18	Finish	4	12
		2844C	**WF-816F**	8 x 16	Finish	4	19
		2844FL	**WF-8160**	8 x 16	Combination	4	18
		na	**WF-105175FO**	10-1/2 x 17-1/2	Float (for use with WF-8160 only)	4	24
	GH48 / DGH48 / CR48	2848F	**WF-618F**	6 x 18	Finish	4	14
		2848C	**WF-818F**	8 x 18	Finish (8" flat finish with round corners)	4	18
		2848FL	**WF-8180**	8 x 18	Combination	4	20
		na	**WX-1018HD**	10 x 18	Float (for use with WF-618 only)	4	30
	▾ Ride-On						
	Rocket Rider / RTR 100	2744F	**WF-616F**	6 x 16	Finish	4	12
		2844C	**WF-816F**	8 x 16	Finish (8" flat finish with round corners)	4	19
		2844FL	**WF-8160**	8 x 16	Combination	4	18
KELLY	▾ Walk-Behind						
	36OT New	23674	**WX-614F**	6 x 14	Finish	4	11
		23673	**WX-8140**	8 x 14	Combination	4	14
		23675	**WX-1014FO**	10 x 14	Float	4	21
	46OT	23597	**WX-618F**	6 x 18	Finish	4	14
		23548	**WX-8180**	8 x 18	Combination	4	19
		23596	**WX-1018HD**	10 x 18	Float		30

Wagman Original Silver Blade Fitting Guide Continued

Manufacturer	Machine Model #	Manufacturer Part#	Wagman Part #	Blade Size (in inches)	Blade Type	Blades Per Ctn.	Wt. Per Ctn. lbs.
ARROW MASTER (KOERING) (KOHERING) NOTE: FT & FC blades include bolts, lockwashers & nuts	▾ Walk-Behind						
	UT4	na	**WM-61325CH**	6 x 13-1/4	Finish (7/8" c hannel with 5/16" nut)	4	9
		na	**WM-8140CH**	6 x 13-1/4	Combination (7/8" channel with 5/16" nut)	4	12
	▾ Retrofit Bars for Use w/ CH Blades Only (Snap Pins Sold Separately)						
	Retrofit Bar	36"	**WMB-1400**	-	10" x 7/8" bar for 13 1/4" blade	-	7.2
		46"	**WMB-1800**	-	14" x 7/8" bar for 18" blade	-	8.8
	Snap Pin	na	**WMSP-100**	-	1 - snap pin - fit all CH blades	-	1
MARSHALLTOWN (CMC) (WONDER)	▾ Walk-Behind						
	3031 & E4	M-6096	**WX-611F**	6 x 11	Finish	4	9
		M-6219	**WX-8110**	8 x 11	Combination	4	12
		A-4173	**WX-911FO**	9 x 11	Float	4	15
	36	M-6093	**WX-614F**	6 x 14	Finish	4	11
		M-7340	**WX-614F FLAT**	6 x 14	Finish (flat)	4	11
		na	**WX-814F**	8 x 14	FInish (8" flat finish with round corners)	4	15
		M-6092	**WX-8140**	8 x 14	Combination	4	14
		A-4172	**WX-914FO**	9 x 14	Float	4	20
	36 PE9 Edger	M-7345	**WX-614FE**	6 x 14	Finish (opposite corners have 2" radius)	4	11
	4433 & E4 / 46	M-6095	**WX-618F**	6 x 18	Finish	4	14
		M-7341	**WX-618F FLAT**	6 x 18	Finish (flat)	4	14
		na	**WX-818F**	8 x 18	Finish (8" flat finish with round corners)	4	18
		M-6094	**WX-818O**	8 x 18	Combination	4	19
		A-4171	**WX-918FO**	9 x 18	Float	4	30
MBW	▾ Walk-Behind						
	F24/4	19340	**WB-47590**	4-3/4 x 9	Combination	4	5
	F30/4	19841	**WB-4751050M6**	4-3/4 x 10-1/2	Combination, metric	4	6
	F36/4	5347	**WX-614F**	6 x 14	Finish	4	11
		na	**WX-614F FLAT**	6 x 14	Finish (flat)	4	11
		na	**WX-814F**	8 x 14	Finish (8" flat finish with round corners)	4	15
		5403	**WX-1014FO**	10 x 14	Float		21
	F46/4	5383	**WX-618F**	6 x 18	Finish	4	14
		na	**WX-618F FLAT**	6 x 18	Finish (flat)	4	14
		na	**WX-818F**	8 x 18	Finish (8" flat finish with round corners)	4	18
		5412	**WX-8180**	8 x 18	Combination	4	19
		5413	**WX-1018HD**	10 x 18	Float	4	30
	▾ Ride-On						
	MK875	na	**WB-610F M8**	6 x 10	Finish, metric	4	8
		na	**WB-8100 M8**	8 x 10	Combination, metric	4	11
		19360	**WB-610F**	6 x 10	Finish	4	8
		19373	**WB-8100**	8 x 10	Combination	4	11
	F78 / MK890 / MK891	5347	**WX-614F**	6 x 14	Finish	4	11
		na	**WX-618F FLAT**	6 x 14	Finish (flat)	4	11
		na	**WX-814F**	8 x 14	Finish (8" flat finish with round corners)	4	15
		5402	**WX-8140**	8 x 14	Combination	4	14
		5403	**WX-1014FO**	10 x 14	Float	4	21
		na	**WX-1014LH**	10 x 14	Float (left handed)	4	21
	F88 / F96 / MK8120 / MK8121	5383	**WX-618F**	6 x 18	Finish	4	14
		na	**WX-618F FLAT**	6 x 18	Finish (flat)	4	14
		na	**WX-818F**	8 x 18	Finish (8" flat finish with round corners)	4	18
		5412	**WX-8180**	8 x 18	Combination	4	19
		5413	**WX-1018HD**	10 x 18	Float	4	30
		na	**WX-1018LH HD**	10 x 18	Float (left handed)	4	30
MORRISON	▾ Walk-Behind						
	36" Dia.	na	**WX-614F**	6 x 14	Finish	4	11
		na	**WX-814F**	8 x 14	Finish (8" flat finish with round corners)	4	15
		na	**WX-8140**	8 x 14	Combination	4	14
		na	**WX-1014FO**	10 x 14	Float	4	21
	46" Dia.	na	**WX-618F**	6 x 18	Finish	4	14
		na	**WF-814F**	8 x 18	Finish (8" flat finish with round corners)	4	18
		na	**WX-8140R2**	8 x 18	Combination	4	19
		na	**WX-1018HD**	10 x 18	Float	4	30
RHIN-O-TUFF	▾ Walk-Behind *Ride-On						
	RE35	10308	**WX-614FE**	6 x 14	Finish (opposite corners have 2" radius)	4	11
	R36	na	**WX-614F**	6 x 14	Finish	4	11
		na	**WX-614F FLAT**	6 x 14	Finish (flat)	4	11
		na	**WX-814F**	8 x 14	Finish (8" flat finish with round corners)	4	15
		na	**WX-8140**	8 x 14	Combination	4	14
		10153	**WF-105175FO**	8 x 14	Combination (flat sides)	4	14
		na	**WX-1014FO**	10 x 14	Float	4	21
	R46 *RR98	na	**WX-618F**	6 x 18	Finish	4	14
		na	**WX-618F FLAT**	6 x 18	Finish (flat)	4	14
		na	**WX-818F**	8 x 18	Finish (8" flat finish with round corners)	4	18
		na	**WX-8180**	8 x 18	Combination	4	19
		10154	**WX-8180R2**	8 x 18	Combination (flat sides)	4	19
		na	**WX-1018HD**	10 x 18	Float	4	30
STOW	▾ Walk-Behind						
	SCT30	na	**WX-611F**	6 x 11	Finish	4	9
		na	**WX-8110**	8 x 11	Combination	4	12
		na	**WX-1011FO**	10 x 11	Float	4	16
	SCT36	22027	**WX-614F**	6 x 14	Finish	4	11
		na	**WX-614F FLAT**	6 x 14	Finish (flat)	4	11
		na	**WX-814F**	8 x 14	Finish (8" flat finish with round corners)	4	15
		22029	**WX-8140**	8 x 14	Combination	4	14
		22028	**WX-1014FO**	10 x 14	Float	4	21
	SCT46	21637	**WX-618F**	6 x 18	Finish	4	14
		na	**WX-618F FLAT**	6 x 18	Finish (Flat)	4	14
		na	**WX-818F**	8 x 18	Finish (8" flat finish with round corners)	4	18
		21988	**WX-8180**	8 x 18	Combination	4	19
		21989	**WX-1018HD**	10 x 18	Float	4	30

Wagman Original Silver Blade Fitting Guide Continued

Manufacturer	Machine Model #	Manufacturer Part#	Wagman Part #	Blade Size (in inches)	Blade Type	Blades Per Ctn.	Wt. Per Ctn. lbs.
TOMAHAWK NOTE: FT & FC blades include bolts, lockwashers and nuts	▾ Walk-Behind						
	UT4	na	**WM-61325CH**	6 x 13-1/4	Finish (7/8" channel with 5/16" nut)	4	9
		na	**WM-8140CH**	6 x 13-1/4	Combination (7/8" channel with 5/16" nut)	4	12
	TPT24H	na	**WB-47590**	4-3/4 x 9	Combination	4	5
	JXPT36K	na	**WX614F**	6 x 14	Finish	4	11
		na	**WX-8140**	8 x 14	Combination	4	14
		na	**WX-1014FO**	10 x 14	Float	4	21
	JXPT46-440	na	**WX-618F**	6 x 18	Finish	4	14
		na	**WX-8180**	8 x 18	Combination	4	19
		na	**WX-1018HD**	10 x 18	Float	4	14
	▾ Retrofit Bars for Use w/ CH Blades Only (Snap Pins Sold Separately)						
	Retrofit Bar	36"	**WMB-1400**	-	10" x 7/8" bar for 13 1/4" blade	-	7.2
		46"	**WMB-1800**	-	14" x 7/8" bar for 18" blade	-	8.8
	Snap Pin	na	**WMSP-100**	-	1 - snap pin - fit all CH blades	-	1
TORO STONE (INGERSOLL RAND BOLT-ON STYLE)	▾ Walk-Behind						
	CF24E	ST32330	**WO-47590**	4-3/4 x 9	Combination	4	15
	T30	ST34576	**WX-611F**	6 x 11	Finish	4	11
		ST34581	**WX-8110**	8 x 11	Combination	4	11
		ST34591	**WX-1011FO**	10 x 11	Float	4	20
	CF364 / T36 / PT36	ST34578	**WX-614F**	6 x 14	Finish	4	11
		na	**WX-614F FLAT**	6 x 14	Finish (flat)		
		ST34583/125-4992	**WX-8140**	8 x 14	Combination		
		ST34587	**WX-1014FO**	10 x 14	Float		
	CF464 / T46 / HDP484 / CF484 / PT 46	ST34580	**WX-618F**	6 x 18	Finish	4	14
		na	**WX-618F FLAT**	6 x 18	Finish (flat)	4	14
		ST34585/125-4996	**WX-8180**	8 x 18	Combination	4	18
		ST34589	**WO-1018FO**	10 x 18	Float	4	30
WACKER NEUSON	▾ Walk-Behind						
	CT24	na	**WA-47590 M6**	4-3/4 x 9	Combination, metric	4	5
	CT30	89953	**WA-6105F**	6 x 10-1/2	Finish	4	8
		89954	**WA-81050**	8 x 10-1/2	Combination	4	10
		110574	**WX-1011FO**	10 x 11	Float	4	16
	CT36	79638	**WX-614F**	6 x 14	Finish	4	11
		na	**WX-614F FLAT**	6 x 14	Finish (flat)	4	11
		na	**WX-814F**	8 x 14	Finish (8" flat finish with round corners)	4	15
		79637	**WX-8140**	8 x 14	Combination	4	14
		75061	**WX-1014FO**	10 x 14	Float	4	21
	CT42	73341	**WA-6165F**	6 x 16-1/2	Finish	4	14
		73340	**WA-81650**	6 x 16-1/2	Combination	4	17
		74725	**WA-10165FO**	10 x 16-1/2	Float	4	24
	CT48	79642	**WX-618F**	6 x 18	Finish	4	14
		na	**WX-618F FLAT**	6 x 18	Finish (flat)	4	14
		na	**WX-818F**	8 x 18	Finish (8" flat finish with round corners)	4	18
		79641	**WX-8180**	8 x 18	Combination	4	19
		112000	**WX-1018WHC**	10 x 18	Float (high clip)	4	30
	▾ Ride-On						
	CRT36ASO / CRT36ASN	79638	**WX-614F**	6 x 14	Finish	4	11
		na	**WX-814F**	8 x 14	Finish (8" flat finish with round corners)	4	15
		79637	**WX-8140**	8 x 14	Combination	4	14
		75061	**WX-1014FO**	10 x 14	Float	4	21
		87835	**WX-1014LH**	10 x 14	Float (left handed)	4	21
	CRT3623KH / CRT3624AH	79638	**WX-614F**	6 x 14	Finish	4	11
		na	**WX-814F**	8 x 14	Finish (8" flat finish with round corners)	4	15
		79637	**WX-8140**	8 x 14	Combination	4	14
		152820	**WX-1014WHC**	10 x 14	Float (high clip)	4	21
		152821	**WX-1014WHCLH**	10 x 14	Float (left handed, high clip)	4	21
	CRT46ASO / CRT46KHO / CRT46KHN	79642	**WX-618F**	6 x 18	Finish	4	14
		na	**WX-818F**	8 x 18	Finish (8" flat finish with round corners)	4	18
		79641	**WX-8180**	8 x 18	Combination	4	19
		75693	**WX-1018HD**	10 x 18	Float	4	30
		87836	**WX-1018LHHD**	10 x 18	Float (left handed)	4	30
	CRT4825KH&L / CRT4831VH	79642	**WX-618F**	6 x 18	Finish	4	14
		na	**WX-818F**	8 x 18	Finish (8" flat finish with round corners)	4	18
		79641	**WX-8180**	8 x 18	Combination	4	19
		112000	**WX-1018WHC**	10 x 18	Float (high clip)	4	30
		152819	**WX-1018WHCLH**	10 x 18	Float (left handed, high clip)	4	30
	CRT60	na	**WX-623F**	6 x 23	Finish	4	19
		na	**WX-823F**	8 x 23	Finish (8" flat finish with round corners)	4	24
		na	**WX-8230**	8 x 23	Combination	4	24
WHITEMAN/ MULTIQUIP	▾ Walk-Behind						
	C Series 24"	C-244	**WX-5925M6**	5 x 9-1/4	Combination, metric	4	8
	M Series 30"	F-300	**WW-611F**	6 x 10-1/2	Finish	4	8
		C-334	**WW-8110**	8 x 10-1/2	Combination	4	10
		na	**WX-1011FO**	10 x 11	Float	4	16
	J Series 36"/ HP Series 36"	F-900	**WX-614F**	6 x 14	Finish	4	11
		F-901	**WX-614F FLAT**	6 x 14	Finish (flat)	4	11
		na	**WX-814F**	8 x 14	Finish (8" flat finish with round corners)	4	15
		C-844R	**WX-8140**	8 x 14	Combination	4	14
		C-844	**WX-8140R2**	8 x 14	Combination (Flat Sides)	-	14
		CL-954F	**WX-1014FO**	10 x 14	Float	-	21
	J3036H55 36"	na	**WW-8140E**	8 x 14	Combination edging	4	14
	B Series 46" / HP Series 46" / HD Series 48"	F-400	**WX-618F**	6 x 18	Finish	4	14
		F-0401	**WX-618F FLAT**	6 x 18	Finish (flat)	4	14
		RC818	**WX-818F**	8 x 18	Finish (8" flat finish with round corners)	4	18
		C-464R	**WX-8180**	8 x 18	Combination	4	19
		C-464	**WX-8180R2**	8 x 18	Combination (flat sides)	4	19
		CL-444F	**WX-1018HD**	10 x 18	Float	4	30

Wagman Original Silver Blade Fitting Guide Continued

Manufacturer	Machine Model #	Manufacturer Part#	Wagman Part #	Blade Size (in inches)	Blade Type	Blades Per Ctn.	Wt. Per Ctn. lbs.
WHITEMAN/ MULTIQUIP Continued	▾ Ride-On						
	JTN36" / JWN36" / JTO36" / LD6SL	F-900	**WX-614F**	6 x 14	Finish	4	11
		F-901	**WX-614F FLAT**	6 x 14	Finish (flat)	4	11
		na	**WX-814F**	8 x 14	Finish (8" flat finish with round corners)	4	15
		C-844R	**WX-8140**	8 x 18	Combination	4	14
		CL-954F	**WX-1014FO**	10 x 14	Float	4	21
		CL-975L	**WX-1014LH**	10 x 14	Float (left handed)	4	21
	BTO46"/ HHN / HHX / HTH Series 48" / HTN / HTO / HTX	F-400	**WX-618F**	6 x 18	Finish	4	14
		F-0401	**WX-618F FLAT**	6 x 18	Finish (flat)	4	14
		RC818	**WX-818F**	8 x 18	Finish (8" flat finish with round corners)	4	18
		C-465R	**WX-8180**	8 x 18	Combination	4	19
		CL-444F	**WX-1018HD**	10 x 18	Float	4	30
		CL-1644L	**WX-1018LH HD**	10 x 18	Float (left handed)	4	30
	HTXD6i / HTXG6DF / HTX6H	na	**WW-816F**	8 x 16	Finish (8" flat finish with round corners)	14	16
		See Poly Pro on pages 8-9, Gold Pro and Blue XL on pages 10-11 for additional blades					
	STH 60" Hydrostatic / STX	na	**WX-623F**	6 x 23	Finish	4	19
		na	**WX-8230**	8 x 23	Combination	4	24
		na	**WX-823F**	8 x 23	Finish (8" flat finish)	4	24
	▾ Specialty Combination Blade, See Page 18 For Image						
	Flat Ends, 2" Radius Trailing Corners, No Front Corner Cut	C844	**WX-8140R2**	8 x 14	Combination	4	14
		C464	**WX-8180R2**	8 x 18	Combination	4	18
	▾ 7/8" Channel Mount Blades						
	36" Machines	QF-1872	**WM-61325CH**	6 x 13-1/4	Finish	4	9
		QC-1871	**WM-8140CH**	8 x 14	Combination	4	12
		na	**WM-1014FF**	10 x 13-1/4	Float	4	19
	46"-48" Machines	QF-1874	**WM-618CH**	6 x 18	Finish	4	8
		QC-1873	**WM-8180CH**	8 x 18	Combination	4	15
		na	**WM-1018B**	10 x 18	Float (high clip)	4	26
		na	**WM-1018FF**	10 x 18	Float	4	27
	▾ Retrofit Bar - For Use With Channel Mount Blades Only (Snap Pins Not Included), See Page 17 For Image						
	Retrofit Bar	QB-1857	**WMB-1400**	10" x 7/8" bar for 14" blade		–	2
		QB-1856	**WMB-1800**	14" x 7/8" bar for 18" blade		–	3
	Snap Pin	QS-1869	**WMSP-100**	1 - snap pin - fit all CH blades		1	1

Wagman 8" Steel Finish Blades

Shown: WX-818F



Blade Type	Manufacturer	Wagman Part #	Blade Size (in inches)	Blades Per Ctn.	Wt. Per Ctn. lbs.
Silver 8" Finish	Allen, Bartell, MBW, Toro / Stone, Stow, Wacker, Whiteman & More	**WX-814F**	8 x 14	4	15
		WX-818F	8 x 18	4	28
	Whiteman	**WW-816F**	8 x 16	4	16
	Arrow Master, WM adapters	**WM-818CH**	8 x 18	4	16
	Superior	**WF-814F**	8 x 14	4	16
	Boren Super Trowel, Superior	**WF-816F**	8 x 16	4	19
		WF-818F	8 x 18	4	21
	Allen, Wacker, Whiteman	**WX-823F**	8 x 23	4	24
Blue XL 8" Finish	Allen, Bartell, MBW, Toro / Stone, Stow, Wacker, Whiteman & More	**WX-814 BXL**	8 x 14	4	15
		WX-818 BXL	8 x 18	4	20
	Boren Super Trowel, Superior, Husq.	**WF-817 BXL**	8 x 17	4	22
		WF-818 BXL	8 x 18	4	20
Gold Pro 8" Finish	Allen, Bartell, MBW, Toro / Stone, Stow, Whiteman, Wacker & More	**WX-814 PRO**	8 x 14	4	16
		WRCB-81375 PRO	8 x 13-3/4	4	17
		WX-818 PRO	8 x 18	4	21
		WRCB-81775 PRO	8 x 17-3/4	4	25
	Whiteman	**WW-816PRO**	8 x 16	4	19
	Allen, Wacker, Whiteman	**WX-823 PRO**	8 x 23	4	28
		WRCB-823 PRO	8 x 23	4	29
	Arrow Master	**WM-818 CH PRO**	8 x 18	4	20
	Boren Super Trowel, Superior, Husq.	**WF-818 PRO**	8 x 14	4	21

Note: Match model numbers with appropriate part numbers.

Internationally Made Power Trowels

Manufacturer	Machine Model #	Wagman Part #	Blade Size (in inches)	Blade Type	Blades Per Ctn.
Belle (England)	1200	**WX-618F**	6 x 18	Finish	4
		WX-8180	8 x 18	Combination	4
		WX-1018HD	10 x 18	Float	4
Besto (Holland)	90 CM Dia. (36")	**WX-614F**	6 x 14	Finish	4
		WX-8140	8 x 14	Combination	4
		WX-1014FO	10 x 14	Float	4
	120 CM Dia. (46")	**WX-618F**	6 x 18	Finish	4
		WX-8180	8 x 18	Combination	4
		WX-1018HD	10 x 18	Float	4
Dynapac (France)	BG21 (24")	**WX-5925M6**	5 x 9-1/4	Combination, metric	4
Errut (England)	90 CM Dia. (36")	**WX-614F M-8**	6 x 14	Finish, metric	4
		WX-8140 M-8	8 x 14	Combination, metric	4
		WX-1014FO	10 x 14	Float	4
	120 CM Dia. (120)	**WX-618F M-8**	6 x 18	Finish, metric	4
		WX-8180 M-8	8 x 18	Combination, metric	4
		WX-1018HD	10 x 18	Float	4

Manufacturer	Machine Model #	Wagman Part #	Blade Size (in inches)	Blade Type	Blades Per Ctn.
Naigai (Japan)	90 CM Dia. (36")	**WX-614F M-8**	6 x 14	Finish, metric	4
		WX-8180 M-8	8 x 14	Combination, metric	4
		WX-1014FO	10 x 14	Float	4
Shatal (Israel)	120 CM Dia. (46")	**WX-618F M-8**	6 x 18	Finish, metric	4
		WX-8180 M-8	8 x 18	Combination, metric	4
		WX-1018FO	10 x 18	Float	4
	74 CM Dia. (29")	**WXTL-6110**	6 x 11	Combination	4
	90 CM Dia. (36")	**WX-614F**	6 x 14	Finish	4
		WX-8140	8 x 14	Combination	4
		WX-1014FO	10 x 14	Float	4
	120 CM Dia. (46")	**WX-618F**	6 x 18	Finish	4
		WX-8180	8 x 18	Combination	4
		WX-1018HD	10 x 18	Float	4
Weber (Germany)	90 CM Dia. (36")	**WX-614F M-8**	6 x 14	Finish, metric	4
		WX-8014 M-8	8 x 14	Combination, metric	4
		WX-1014FO	10 x 14	Float	4

Blue XL®

UP TO 25% LONGER LIFE

The Wagman Blue XL® Blade was designed to provide a perfect balance between longer blade life and maximum operating smoothness with the versatility to be used on both ride-on and walk-behind power trowels.

The Blue XL® is thicker than ordinary blades and, combined with its ability to flex slightly, has improved performance and prolonged blade life.

- Proven record in delivering 15% to 25% longer life than standard silver blades
- Available in finish and combination blade

A Rental Industry Standard!

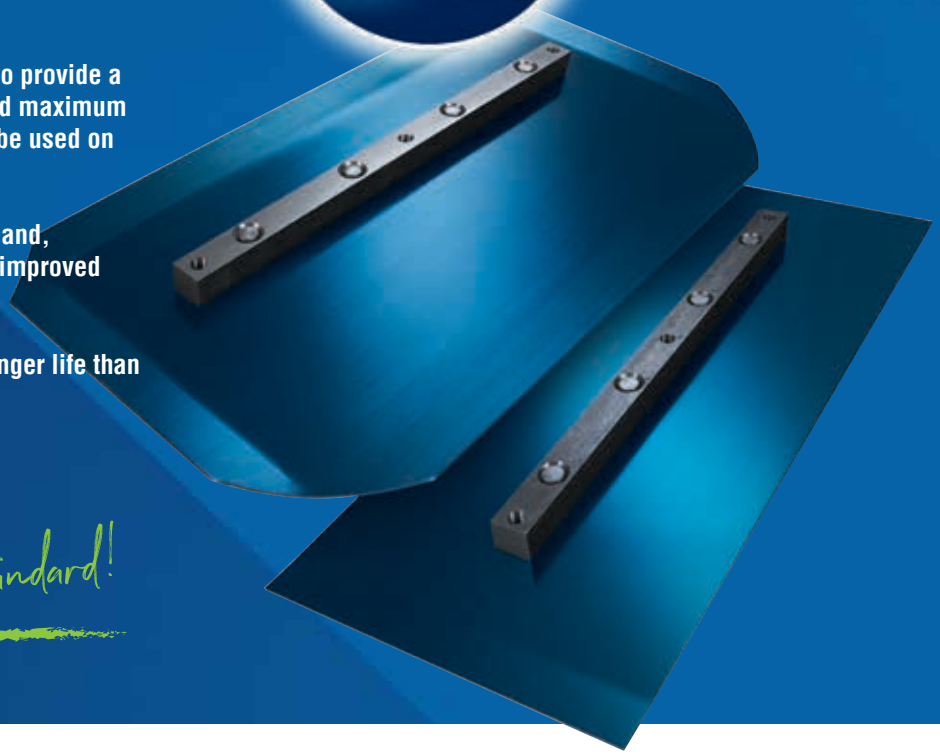

Wagman relative trowel blade thickness:



Designed for: Ride-on Trowels

Wagman Blue XL® Fitting Guide

Power Trowel Manufacturer	Wagman Part #	Blade Size (in inches)	Blade Type	Blades Per Ctn.	Weight Per Ctn. lbs.
34" - 36" Dia. Allen, Bartell, Champion, Dart, ESI, Essick, Kelley, MBW, Marshalltown, Morrison, Muller, Oscar, Rhin-O-Tuff, Toro / Stone, Stow (new style), Wacker, Whiteman	WX-614 BXL	6 x 14	Finish	4	13
	WX-814 BXL	8 x 14	Finish (8" flat with round corners)	4	15
	WX-8140 BXL	8 x 14	Combination	4	16
46" - 48" Dia. 4 and 5-Bladed Allen, Bartell, Champion, Dart, ESI, Essick, Kelley, MBW, Marshalltown, Morrison, Muller, Oscar, Rhin-O-Tuff, Toro / Stone, Stow (new style), Wacker, Whiteman	WX-618 BXL	6 x 18	Finish	4	17
	WX-818 BXL	8 x 18	Finish (8" flat with round corners)	4	20
	WX-8180 BXL	8 x 18	Combination	4	21
48" Dia. Whitman HTXD6i, HTXG6DF, HTX6H, Rider, Twin 6-Bladed	WW-616-BXL	6 x 16	Finish	4	14
30" Dia. Allen 430 Edging Walker	WB-6105 BXL	6 x 10-1/2	Finish	4	11
60" Dia. Allen, Wacker Neuson, Whiteman	WX-623 BXL	6 x 23	Finish	4	21
	WX-8230 BXL	8 x 23	Combination	4	26
36" Dia. 7/8" Channel Mount Style	WM-61325 BXL	6 x 13-1/4	Finish	4	11
	WM-8140CH BXL	8 x 14	Combination	4	14
	WM-8140RT BXL	8 x 14	Combination	4	14
46"- 48" Dia. 7/8" Channel Mount Style	WM-618 BXL	6 x 18	Finish	4	14
	WM-8180CH BXL	8 x 18	Combination	4	18
	WM-8180RT BXL	8 x 18	Combination	4	18
36" Dia. Boren Super Trowel	WF-81250 BXL	8 x 12-1/2	Combination	4	17
36" Dia. Husqvarna, Superior, Essick	WF-8140 BXL	8 x 14	Combination	4	17
44" Dia. Boren Super Trowel, Husqvarna, Superior, Essick	WF-8160 BXL	8 x 16	Combination	4	21
48" Dia. Boren Super Trowel, Husqvarna, Superior	WF-817 BXL	8 x 17	Finish	4	22
	WF-818 BXL	8 x 18	Finish (8" flat with round corners)	4	20
	WF-8180 BXL	8 x 18	Combination	4	23
34" - 42" Dia. EDCO Trowels / Adapters	WED-614 BXL	6 x 14	Finish	4	13
	WED-8140 BXL	8 x 14	Combination	4	16
44" - 48" Dia. EDCO Trowels / Adapters	WED-618 BXL	6 x 18	Finish	4	18
	WED-8180 BXL	8 x 18	Combination	4	22

Gold Pro®

UP TO 50% LONGER LIFE

The Wagman Gold Pro® is a blade built tough to meet the demands of ride-on power trowels or any other application where long-lasting life is required.

Constructed from extra thick high-performance temp steel, the Gold Pro® is the longest lasting steel blade available.

Since the Gold Pro® Blade is made from a heavier weight steel and tends to be a bit more stiff, Wagman suggests that the Gold Pro® blade be used primarily on ride-on trowel machines.

- High chrome and carbon content increases abrasion resistance
- Proven record in delivering 25% to 50% longer life than most silver trowel blades
- Available in finish and combination blade



Wagman relative trowel blade thickness:



Designed for: Ride-on Trowels

Wagman Gold Pro® Fitting Guide

Power Trowel Manufacturer	Wagman Part #	Blade Size (in inches)	Blade Type	Blades Per Ctn.	Weight Per Ctn. lbs.
34" - 36" Dia. Allen, Bartell, Champion, Dart, ESI, Essick, Kelley, MBW, Marshalltown, Morrison, Muller, Oscar, Rhin-O-Tuff, Toro / Stone, Stow (new style), Wacker, Whiteman	**WX-614 PRO**	6 x 14	Finish	4	14
	WRCB-81375 PRO	8 x 13-3/4	Finish (8" flat with round corners, wide bar, extra rivets)	4	17
	WX-814 PRO	8 x 14	Finish (8" flat with round corners)	4	16
	WX-8140 PRO	8 x 14	Combination	4	17
42" Dia. Allen	**WX-616 PRO**	6 x 16	Finish	4	16
	WRCB-816 PRO	8 x 16	Finish (8" flat with round corners, wide bar, extra rivets)	4	22
	WX-8160 PRO	8 x 16	Combination	4	20
46" - 48" Dia. 4 and 5-Bladed Allen, Bartell, Champion, Dart, ESI, Essick, Kelley, MBW, Marshalltown, Morrison, Muller, Oscar, Rhin-O-Tuff, Toro / Stone, Stow (new style), Wacker, Whiteman	**WX-618 PRO**	6 x 18	Finish	4	18
	WRCB-81775 PRO	8 x 17-3/4	Finish (8" flat with round corners, wide bar, extra rivets)	4	25
	WX-818 PRO	8 x 18	Finish (8" flat with round corners)	4	21
	WX-8180 PRO	8 x 18	Combination	4	22
48" Dia. Whitman HTXD6i, HTXG6DF, HTX6H, Rider, Twin 6-Bladed	**WW-616 PRO**	6 x 16	Finish	4	16
	WW-8160 PRO	8 x 16	Combination	4	18
	WW-816 PRO	8 x 16	Finish (8" flat with round corners)	4	19
60" Dia. Allen, Wacker Neuson, Whiteman	**WX-623 PRO**	6 x 23	Finish	4	23
	WX-823 PRO	8 x 23	Finish (8" flat with round corners)	4	28
	WRCB-823 PRO	8 x 23	Finish (8" flat with round corners, wide bar, extra rivets)	4	29
	WX-8230 PRO	8 x 23	Combination	4	28
36" Dia. 7/8" Channel Mount Style	**WM-61325 PRO**	6 x 13-1/4	Finish	4	12
	WM-8140CH PRO	8 x 14	Combination	4	15
	WM-8140RT PRO	8 x 14	Combination	4	15
46" - 48" Dia. 7/8" Channel Mount Style	**WM-618 PRO**	6 x 18	Finish	4	15
	WM-818CH PRO	8 x 18	Finish (8" flat with round corners)	4	20
	WM-8180CH PRO	8 x 18	Combination	4	19
	WM-8180RT PRO	8 x 18	Combination	4	19
36" Dia. Husqvarna Superior, Essick	**WF-8140 PRO**	8 x 14	Combination	4	18
44" Dia. Boren Super Trowel, Husqvarna Superior	**WF-8160 PRO**	8 x 16	Combination	4	22
48" Dia. Boren Super Trowel, Husqvarna Superior	**WF-818 PRO**	8 x 18	Finish (8" flat with round corners)	4	20
	WF-8180 PRO	8 x 18	Combination	4	24
34" - 42" Dia. EDCO Trowels / Adapters	**WED-614 PRO**	6 x 14	Finish	4	14
	WED-8140 PRO	8 x 14	Combination	4	17
44" - 48" Dia. EDCO Trowels / Adapters	**WED-618 PRO**	6 x 18	Finish	4	19
	WED-8180 PRO	8 x 18	Combination	4	23

EDCO Adapters



Shown: WED-01A

Shown: WED-02B

- Adapts trowels to use EDCO-style quick-change blades

Note: Hardware included

Part #	Description	Weight
WED-01A	"A" adapter Fits 28" - 42" trowels	2 lbs
WED-02B	"B" adapter Fits 44" - 48" trowels	3 lbs
Replacement Springs		
WED-A-SPRING	"A" adapter spring	0.5 lb
WED-B-SPRING	"B" adapter spring	0.5 lb

Retrofit Bar & Snap Pin

Shown: WMB-1800 W/ WMSP-100 (2)



- Allows use of 7/8"-channel WM quick-change blades in place of WX blades
- Snap pins sold separately

Part #	Description	Weight
WMB-1400	Bar for 14" WM blade Fits 36" trowel	2 lbs
WMB-1600	Bar for 16" WM blade Fits 42" trowel	2 lbs
WMB-1800	Bar for 18" WM blade Fits 46" trowel	3 lbs
WMSP-100	1 - snap pin	0.5 lb

Note: One bar requires two snap pins

Wagman Power Trowel Blade Pictorial Reference

WX Series Blades

Fit the following manufacturers' power trowels:
Allen, Bartell, Champion, Dart, ESI, Kelley, MBW, Marshalltown, Morrison, Muller, Rhin-O-Tuff, Toro / Stone, Best, Dixie, Stow (new style), Wacker, Whiteman.



WX-614F Finish blade 6" x 14"	**WX-8140** Combination blade 8" x 14"	**WX-1014FO** Float blade 10" x 14"	**WX-8140R2** Combination blade with no corner cuts and 2" radius trailing corners 8" x 14"	**WX-618F** Finish blade 6" x 18"	**WX-818F** 8" flat finish blade with rounded edges 8" x 18"



WX-8180 Combination blade 8" x 18"	**WX-8180R2** Combination blade with no corner cuts and 2" radius trailing corners 8" x 18"	**WX-8230** Combination blade 8" x 23"	**WX-5925M6** Combination blade 5" x 9 1/4" *fits Whiteman	**WX-614FE** Finish blade with 2" radius on Opposite corners 6" x 14"

WF Series Blades

Fit the following manufacturers' power trowels: Boren Super Trowel, Superior power trowels



WF-616F Finish Blade 6" x 16"	**WF-816F** 8" Flat Finish Blade w/ Rounded Corners 8" x 16"	**WF-8160** Combination Blade 8" x 16"	**WF-105175FO** Float Blade (Uses WF-8160 only) 10 1/2" x 17 1/2"

WF Series Blades

Fit the following manufacturers' power trowels: Bartell power trowels

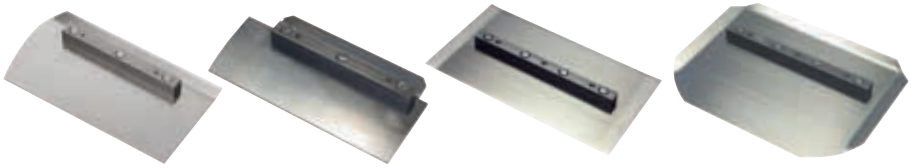

WB-47590	WB-4800	WB-6105F	WB-81050
Combination blade	Combination blade	Finish blade	Combination blade
4 3/4" x 9"	4" x 8"	6" x 10 1/2"	8" x 10 1/2"

WM Series Blades

Fit the following manufacturers' power trowels:
Arrow Master, Multiquip channel style power trowels, and WM adapters.



WM-61325CH	WM-8140CH	WM-618CH	WM-8180CH	WM-8180RT
Finish blade with 7/8" channel 6" x 13 1/4"	Combination blade with 7/8" channel 8" x 14"	Finish blade with 7/8" channel 6" x 18"	Combination blade with 7/8" channel 8" x 18"	Combination blade with channel near trailing edge 8" x 18"

WED Series Blades

Fit the following manufacturers' power trowels:
EDCO power trowels and adapters

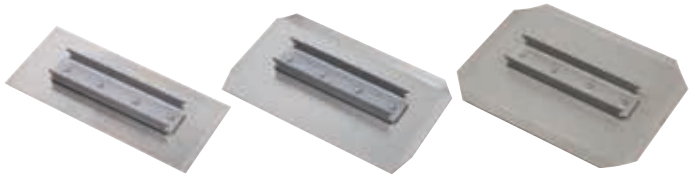

WED-614	WED-8140	WED-1014
Finish blade with 6" x 14" channel length, 9.19" x 2" width	Combination blade with 8" x 14" channel length, 9.19" x 2" width	Float blade with 10" x 14" channel length 9.19" x 2" width

WW Series Blades



WW-816F	WW-616F
Finish blade 8" x 16"	Finish blade 6" x 16"

Online Trowel Fitting Guide

The Wagman Online Fitting Guide will help you easily see all of the trowel blades and pans that fit your machine.

Choose the make and model of your equipment for a list of what fits your trowel.

Visit www.Wagman.us for the interactive fitting guide.

Pro Float Pan®

1 Precise Dish

A precise dish and flange design prevents "oil canning" and helps prevent the pan from digging into the concrete. The precise dish provides consistent super flat floors.

2 Heavy Duty Clips

Wagman Pro Float Pan® Clips are MIG welded on three sides to ensure maximum strength and prevent blades from jamming.

3 High-performance Steel

Our complete line of Pro Float Pans® use specialized float steel to provide consistent wear for maximum performance and a longer life.



Tips For Best Panning Results



Rotate Pans

Conditions on your ride-on power trowel may cause pans to wear unevenly. Rotate your pans midway through use on ride-on power trowels for optimal life.

Set Blades Flat

During operation, set blades to the flattest position possible. If blades are pitched they may cause the pan to wear faster.



WRCB - Prefered Panning Blade

Wagman WRCB blades have an extra wide mounting bar with extra rivets for increased strength making them the ideal blades to use with a float pan.

Pro Float Pan ®



- Heavy-duty MIG welded steel z-clips
- Achieve flatter floors and increase production
- Allows operators to wait longer before getting on the slab
- Bi-rotational pan (can be spun both ways) designed for non-overlapping ride-on or walk-behind power trowels
- Rotate pans midway through use on ride-on power trowels
- Cover a larger area than with float blades
- Available with mild dish for super flat floors or regular dish for easier control
- For best performance, set trowel blades to the flattest position

Mild Dish (Available in all sizes):
For super flat floors



Regular Dish (Available in WFP-44 & WFP-46 pans):
For easy steering & operator control



Part #	Dish	Weight	Total Clips
WFP-34-M-4	Mild	41 lbs	8
WFP-36B-M-4	Mild	40 lbs	8
WFP-36-M-3	Mild	45 lbs	3
WFP-36S-M-4	Mild	45 lbs	4
WFP-36-M-4	Mild	44 lbs	8
WFP-39-M-4	Mild	52 lbs	8
WFP-44-M-4	Mild	64 lbs	8
WFP-45-M-4	Mild	65 lbs	8
WFP-45-M-5	Mild	66 lbs	10
WFP-45-M-6	Mild	65 lbs	6
WFP-46-M-3	Mild	69 lbs	6
WFP-46-R-3	Regular	69 lbs	6
WFP-46-M-4	Mild	70 lbs	8
WFP-46-R-4	Regular	70 lbs	8
WFP-46-M-5	Mild	70 lbs	10
WFP-46-R-5	Regular	70 lbs	10
WFP-46B-M-4	Mild	61 lbs	8
WFP-60-M-6	Mild	104 lbs	12
WFP-62-M-5	Mild	115 lbs	10
WFP-62-M-6	Mild	115 lbs	6

Safety Catch Pan



- Attach a pan to a power trowel more securely
- The safety catch pan uses latch pins to secure the trowel blade to the pan
- Pan includes safety catch pins



Wagman Safety Catch Pans are sold with safety catch pins that more securely attach the pan to the power trowel.

Part #	Dish	Weight	Total Clips
WFP-24-E-4-SC	No Dish	19 lbs	4
WFP-36B-M-4-SC	Mild	40 lbs	8
WFP-36-M-4-SC	Mild	45 lbs	8
WFP-44-M-4-SC	Mild	62 lbs	8
WFP-45-M-4-SC	Mild	66 lbs	8
WFP-45-M-5-SC	Mild	66 lbs	10
WFP-45-M-6-SC	Mild	65 lbs	6
WFP-46-M-4-SC	Mild	69 lbs	8
WFP-46-R-4-SC	Regular	63 lbs	8
WFP-46-M-5-SC	Mild	69 lbs	10
WFP-46-R-5-SC	Regular	63 lbs	10
WFP-46B-M-4-SC	Mild	69 lbs	8
WFP-60-M-6-SC	Mild	108 lbs	6
WFP-62-M-5-SC	Mild	115 lbs	10
WFP-62-M-6-SC	Mild	115 lbs	6
Accessories:			
WFP-SCP	1 Replacement safety catch pin, .05 lb.		
WFP-SCP2	1 Replacement bent pin for WFP46 safety catch pans, .05 lb.		

Pro Float Pan Plus®



- Extend the life of your float pans
- The Pro Float Pan Plus® has an additional steel liner welded to an original float pan
- Better weight distribution and better wear features
- Available in mild dish and 4-blade models only



The Wagman Pro Float Pan Plus has a steel liner welded to the pan where the blades sit and the pan wears the most. Pans are available in left and right-handed models.

Part #	Dish	Weight	Total Clips
WFP-36B-M-4-P-R	Mild	60 lbs	4 right-hand
WFP-36B-M-4-P-L	Mild	60 lbs	4 left-hand
WFP-36-M-4-P-R	Mild	60 lbs	4 right-hand
WFP-36-M-4-P-L	Mild	60 lbs	4 left-hand
WFP-39-M-4-P-R	Mild	69 lbs	4 right-hand
WFP-39-M-4-P-L	Mild	69 lbs	4 left-hand
WFP-44-M-4-P-R	Mild	86 lbs	4 right-hand
WFP-44-M-4-P-L	Mild	86 lbs	4 left-hand
WFP-46-M-4-P-R	Mild	91 lbs	4 right-hand
WFP-46-M-4-P-L	Mild	91 lbs	4 left-hand
WFP-46B-M-4-P-R	Mild	91 lbs	4 right-hand
WFP-46B-M-4-P-L	Mild	91 lbs	4 left-hand

Note: Ride-on power trowels require a right-hand and left-hand Pro Float Pan Plus

Edger Pan



- 90˚ lip so you can trowel next to a wall or obstruction
- The Edger pan is designed specifically for edging power trowels
- Save time with the Wagman Edger Pan by troweling areas you would normally have to hand float



Wagman Edger Pans are designed specifically for edging style power trowels. The 90˚ lip allows for the ability to trowel next to walls or obstructions.

Part #	Dish	Weight	Total Clips
WFP-24-E-4	No dish	13 lbs	4
WFP-24-E-4-SC*	No dish	19 lbs	4
WFP-24S-E-4	No dish	19 lbs	4
WFP-30B-E-4	No dish	29 lbs	4
WFP-30-E-4	No dish	29 lbs	4
WFP-30S-E-4	No dish	29 lbs	4
WFP-36-E-4	No dish	33 lbs	8

*Safety catch style

Note: Pans not recommended for walk-behind trowels 46" or larger.
Do you have a machine not listed below? Call us at 717-854-2120.

Manufacturer	Machine Model #	Machine Diameter	# Of Blades	Pro Float Pan	Safety Catch Pan	Pro Float Pan Plus	Edger Pan
ALLEN	**Walk-Behind**						
	VP424	24"	4	▸	▸	▸	WFP-24-E-4
	430 Edging Walker	30"	4				WFP-30-E-4
	436 Edging Walker	36"	4	▸	▸	▸	WFP-36-E-4
	436	36"	4	WFP-36-M-4	WFP-36-M-4-SC	WFP-36-M-4-P-R	—
	VP436	36"	4	WFP-39-M-4			
	Ride-On						
	Edgers: 900 / MP225 / MP235	36"	4	▸	▸	▸	WFP-36-E-4
	Pro 900 n-o / MP205 / MP215	36"	4	WFP-36-M-4	WFP-36-M-4-SC	WFP-36-M-4-P-R / L	—
	HP100 / HP200 / MP305 / MP315 / Pro 1200 (non-overlap) SP400 / SP450	46"	4	WFP-46-M-4 / WFP-46-R-4 WFP-45-M-4	WFP-46-M-4-SC / WFP-46-R-4-SC WFP-45-M-4-SC	WFP-46-M-4-P-R / L —	—
	HD530 / HDX600 / Pro1200 / MSP415 / 425 / 450 / 455 / 470 / 430 / 435 / 440 / 445 / 460 / SP 400 B / SP 425	46"	5	WFP-46-M-5 / WFP-46-R-5 WFP-45-M-5	WFP-46-M-5-SC / WFP-46-R-5-SC WFP-45-M-5-SC	—	—
	HDX740 / 750 / 760 / HP205	60"	6	WFP-60-M-6	WFP-60-M-6-SC	—	—
	Super Pro 500 / 550	60"	5	WFP-62-M-5	WFP-62-M-5-SC	—	—
	HD560 / HDX780	60"	6	WFP-62-M-6	WFP-62-M-6-SC	*(Suggest blade part # WX-623F (PRO) to fit properly)*	
BARTELL	**Walk-Behind**						
	B424 Edging Walker	24"	4	▸	WFP-24-E-4-SC	▸	WFP-24-E-4
	B430 Edging Walker	30"	4	▸	▸	▸	WFP-30B-E-4
	B436	36"	4	WFP-36-M-4 WFP-36B-M-4	WFP-36-M-4-SC WFP-36B-M-4-SC	WFP-36-M-4-P-R WFP-36B-M-4-P-R	—
	Ride-On						
	TS78 / BTR88 / TS88	36.5"/38.5"	4	WFP-36-M-4	WFP-36-M-4-SC	WFP-36-M-4-P-R / L	—
	TS96NO (non-overlap)	45-3/4"	4	WFP-44-M-4 / WFP-45-M-4	WFP-44-M-4-SC / WFP-45-M-4-SC	WFP-44-M-4-P-R / L	—
	TS100	48"	4	WFP-46-M-4	WFP-46-M-4-SC	WFP-46-M-4-P-R / L	—
	TS100	48"	5	WFP-46-M-5	WFP-46-M-5-SC	—	—
BOREN SUPER TROWEL	**Walk-Behind**						
	36" Dia.	36"	4	WFP-39-M-4	*(Must use blade part # WF-81250 (BXL) to fit properly)*	WFP-39-M-4-P-R	—
	Ride-On						
	Boren Super Trowel	44"	4	WFP-45-M-4	WFP-45-M-4-SC	—	—
	Boren Super Trowel	44"	5	WFP-45-M-5	WFP-45-M-5-SC	—	—
EDCO	**Walk-Behind**						
	T364	36"	4	WFP-36-M-4	WFP-36-M-4-SC	WFP-36-M-4-P-R	—
ESI	**Walk-Behind**						
	EET60H	24"	4				WFP-24-E-4
	EWT90	36"	4	WFP-39-M-4		WFP-39-M-4-P-R	
	Ride-On						
	ERT2X90H	36"	4	WFP-36-M-4	WFP-36-M-4-SC	WFP-36-M-4-P-R / L	
	ERT2X120	46"	4	WFP-46-M-4 / WFP-45-M-4	WFP-46-M-4-SC / WFP-45-M-4-SC	WFP-46-M-4-P-R / L	
MASTER	**Walk-Behind**						
	F36	36"	4	WFP-36-M-4	WFP-36-M-4-SC	WFP-36-M-4-P-R	—
	Ride-On						
	RFR30324	48-1/2"	3	WFP-46-M-3 / WFP-46-R-3	WFP-46-M-3-SC / WFP-46-R-3-SC	—	—
MBW	**Walk-Behind**						
	F24/4 Edging Walker	24"	4	▸	▸	▸	WFP-24-E-4
	F30/4	30"	4	▸	▸	▸	WFP-30-B-E-4
	F36/4	36"	4	WFP-36-M-4	WFP-36-M-4-SC	WFP-36-M-4-P-R	—
	Ride-On						
	MK875	29-1/2"	4	▸	▸	▸	WFP-30B-E-4
	F78 / F88	36.5"/38.5"	4	WFP-36-M-4	WFP-36-M-4-SC	WFP-36-M-4-P-R / L	—
	MK890 / MK891	35-2/5"	4	WFP-39-M-4		WFP-39-M-4-P-R / L	—
	F96	45-3/4"	4	WFP-44-M-4 / WFP-45-M-4	WFP-44-M-4-SC / WFP-45-M-4-SC	WFP-44-M-4-P-R / L	—
	MK8120 / MK8121	47-1/4"	4	WFP-46-B-M-4	WFP-46-B-M-4-SC	WFP-46-B-M-4-R / L	—
STOW	**Walk-Behind**						
	SCT36 Models	36"	4	WFP-36-M-4	WFP-36-M-4-SC	WFP-36-M-4-P-R	—
SUPERIOR	**Walk-Behind**						
	CR36	36"	4	WFP-39-M-4		WFP-39-M-4-P-R	—
TORO / STONE	**Walk-Behind**						
	CF24E	24"	4	▸	*(Must use blade part # WK-8130 to fit properly)*	▸	WFP-24S-E-4
	CF304	30"	4	▸	▸	▸	WFP-30S-E-4
	CF364	36"	4	WFP-36S-M-4	—	—	—
WACKER NEUSON	**Walk-Behind**						
	CT24	24"	4	▸	▸	▸	WFP-24-E-4
	CT30 Models	30"	4	▸	▸	▸	WFP-30-E-4
	CT36 Models	36"	4	WFP-36-M-4	WFP-36-M-4-SC	WFP-36-M-4-P-R	
	Ride-On						
	CRT36	36"	4	WFP-36-M-4	WFP-36-M-4-SC	WFP-36-M-4-P-R / L	—
	CRT36 (Inner bolt hole spacing)	36"	4	WFP-36B-M-4	*2 sets of holes 2011 & newer models*	▸	—
	CRT46KHN	46"	4	WFP-46-M-4 / WFP-46-R-4 WFP-45-M-4	WFP-46-M-4-SC / WFP-46-R-4-SC WFP-45-M-4-SC	WFP-46-M-4-P-R / L —	—
	CRT4825K	48"	4	WFP-46-M-4 / WFP-46-R-4	WFP-46-M-4-SC / WFP-46-R-4-SC	WFP-46-M-4-P-R / L	—
	CRT48	48"	5	WFP-46-M-5 / WFP-46-R-5	WFP-46-M-5-SC / WFP-46-R-5-SC	—	—
	CRT48 (Inner bolt hole spacing)	48"	5	WFP-45-M-5	*2 sets of holes 2011 & newer models*	—	—
	CRT60	60"	6	WFP-60-M-6	WFP-60-M-6-SC	—	—
WHITEMAN/ MULTIQUIP	**Walk-Behind**						
	C Series	24"	4	▸	▸	▸	WFP-24-E-4
	M Series	30"	4	▸	▸	▸	WFP-30-E-4
	HPL36 / HPH36 / J Series	36"	3 or 4	WFP-36-M-3 / WFP-36-M-4 WFP-36B-M-4	WFP-36-M-3-SC / WFP-36-M-4-SC WFP-36B-M-4-SC	WFP-36-M-4-P-R WFP-36B-M-4-P-R	—
	Ride-On						
	JTN / JWN	36"	4	WFP-36B-M-4	WFP-36B-M-4-SC	WFP-36B-M-4-P-R / L	—
	HTH / HHN / HTX / HHX / HTN	48"	5	WFP-45-M-5	WFP-45-M-5-SC	—	—
	HTN (4-bladed model)	48"	4	WFP-44-M-4 / WFP-45-M-4	WFP-44-M-4-SC / WFP-45-M-4-SC	WFP-44-M-4-P-R / L	—
	HTXD6i / HTXG6DF / HTX6H	48"	6	WFP-45-M-6	WFP-45-M-6-SC	—	—
	STH / STX	60"	6	WFP-60-M-6	WFP-60-M-6-SC	—	—

Pro Tools®

Shown: WCR-200H-C

The Wagman Pro Tools® line is better than ever with additions like a contoured edge for chute scraping, removable steel hook assembly for strength and durability on our aluminum concrete placer rakes (on page 25).





Dirt Tamper

Shown: WDT-88





- One piece steel-pipe construction with welded gussets for extra strength
- 49"-long handle with removable end cap that allows the handle to be filled with sand for extra weight

Part #	Description	Weight
WDT-66	6" x 6"	14 lbs
WDT-88	8" x 8"	17 lbs
WDT-1010	10" x 10"	21 lbs

Metal Handle Concrete Placer– Series 174

Shown: WCR-174

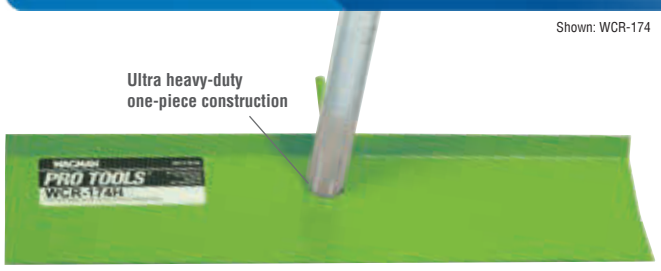

- A heavy-duty, durable one-piece concrete placer
- 1-1/8" dia. x 60" galvanized handle welded directly onto a 19-1/2" x 4-1/2" steel blade
- Available with or without a hook

Part #	Description	Weight
WCR-174H	With hook	7 lbs
WCR-174	No hook	7 lbs
WCR-174H-C	With hook, one curved end	7 lbs
WCR-174-C	No hook, one curved end	7 lbs

Concrete Placer – Series 193

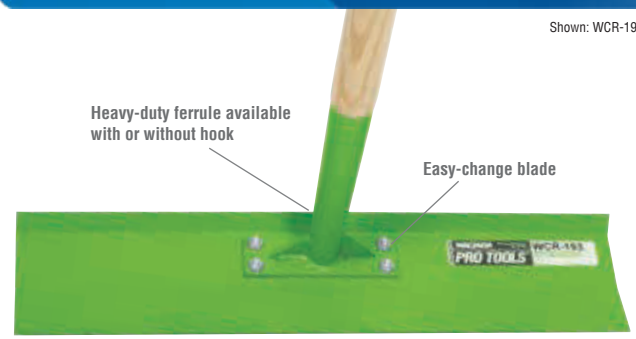

Shown: WCR-193

- Available in a broad range of blade materials to suit a variety of on-site uses
- Placers are available with or without a hook
- High-quality 54" or 60" heavy-duty contoured and tapered wood handle
- 19-1/2" x 4-1/2" blades

AVAILABLE BLADE TYPES:



Standard Steel
Economical 14-guage steel blade



Aluminum
Light-weight aluminum makes for an easy to handle yet rugged placer



Combination Placer & Chute Rake
All versions available use "C" in part number ie. WCR193-C

Part #	Description	Weight
Standard Steel Blade Placers:		
WCR-193H-54	54" handle concrete placer, with hook	6 lbs
WCR-193-54	54" handle concrete placer, no hook	6 lbs
WCR-193H	60" handle concrete placer, with hook	6 lbs
WCR-193	60" handle concrete placer, no hook	6 lbs
WCR-193RB	14-gauge replacement blade	3 lbs
Aluminum Blade Placers:		
WCR-193ALH-54	54" handle concrete placer, with hook	4 lbs
WCR-193AL-54	54" handle concrete placer, no hook	4 lbs
WCR-193ALH	60" handle concrete placer, with hook	4 lbs
WCR-193AL	60" handle concrete placer, no hook	4 lbs
WCR-193ALRB	Aluminum replacement blade	1 lb
Replacement Handle & Ferrules, Blades Not Included:		
WCR-193RHH-54	54" contoured handle with ferrule, with hook	4 lbs
WCR-193RH-54	54" contoured handle with ferrule, no hook	4 lbs
WCR-193RWH-54	54" contoured handle only	3 lbs
WCR-193RHH	60" contoured handle with ferrule, with hook	4 lbs
WCR-193RH	60" contoured handle with ferrule, no hook	4 lbs
WCR-193RWH	60" contoured handle only	3 lbs

Aluminum Concrete Placer– Series 200



Shown: WCR-200H

- 1-1/4" dia x 60" long aluminum handle welded to blade
- Available with heavy duty steel hook bracket or without a hook
- Lightweight 19-1/2" x 4-1/2" aluminum blade

Part #	Description	Weight
WCR-200H	With removable steel hook with one curved end	3.2 lbs
WCR-200	No hook	3.1 lbs
WCR-200H-C NEW	With removable steel hook with one curved end	3.2 lbs
WCR-200-C	No hook with one curved end	3.1 lbs

Straight Ferrule Concrete Placer– Series 165



Shown: WCR-165ALH

- Available with aluminum or steel blade
- 19-1/2" x 4-1/2" 14-gauge steel blade
- Light weight
- Available with or without a hook
- Straight 54" virgin maple handle w/ rounded end
- Split-shell ferrule gives tighter handle fit

Combination Placer & Chute Rake
All versions available use "C" in part number. ie. WCR165-C

Part #	Description	Weight
Aluminum Blade Placers:		
WCR-165ALH	With hook	2 lbs
WCR-165AL	No hook	2 lbs
Steel Blade Placers:		
WCR-165H	With hook	4 lbs
WCR-165	No hook	4 lbs
Replacement Handle:		
WCR-165RH	Replacement handle	2 lbs

Tapered Ferrule Concrete Placer– Series 186



Shown: WCR-186H

- Long-lasting 19-1/2" x 4-1/2" 14-gauge steel blade
- Light weight
- Available with or without a hook
- 54" tapered ash dowel handle
- Tapered ferrule supported by angular braces

Combination Placer & Chute Rake
All versions available use "C" in part number. ie. WCR186-C

Part #	Description	Weight
WCR-186H	With hook	4 lbs
WCR-186	No hook	4 lbs
WCR-186RH	Replacement handle	3 lbs

Speed Float

Shown: SF-48 -NB w/ BB-HSSB-U



- Economical for use after vibratory screed to knock down edge marks
- Extruded aluminum alloy for lighter weight and abrasion resistance
- T-Slot center rib allows easy bracket movement and handle placement
- 5" width ideal for exposed aggregate
- Working surface is gently rounded and radius edges reduce edge marks
- Available with square or round ends
- Handles (see page 27) and brackets (page 28) sold separately

Part #	Length	Weight
Square End Speed Float:		
SF-30-NB	30" square-end speed float, no bracket	4 lbs
SF-36-NB	36" square-end speed float, no bracket	5 lbs
SF-42-NB	42" square-end speed float, no bracket	5 lbs
SF-48-NB	48" square-end speed float, no bracket	6 lbs

Part #	Length	Weight
Round End Speed Float:		
SF-30R-NB	30" round-end speed float, no bracket	4 lbs
SF-36R-NB	36" round-end speed float, no bracket	5 lbs
SF-42R-NB	42" round-end speed float, no bracket	5 lbs
SF-48R-NB	48" round-end speed float, no bracket	6 lbs

Aluminum Alloy Straight Edge

Shown: STEDG-8



- Extruded aluminum alloy for trueness, rigidity, and lighter weight
- Welded ends prevent filling
- Square sides and sharp corners aid in precision work
- Perfect for striking off a pour and for use as a straight edge

Part #	Description	Weight*
WAGMAN 1-3/4" x 4" Straight Edges:		
STEDG-4	4'	10 lbs
STEDG-6	6'	12 lbs
STEDG-8	8'	14 lbs
STEDG-10	10'	16 lbs
STEDG-12	12'	18 lbs
STEDG-14	14'	20 lbs
STEDG-16	16'	22 lbs
STEDG-18	18'	24 lbs
STEDG-20	20'	26 lbs

***Straight edges shipped via truck freight only**

10' Aluminum Alloy Bumpcutter

Shown: BP-120-SI w/ BB-RK & BB-SBHDL-72



- 10' x 1-3/4" x 4" extruded straight edge
- Handles (see page 27) and brackets (page 28) sold separately
- Available with or without outriggers and straightening-rod system

Part #	Description	Weight*
10' Bump Cutters with Straightening Rod System and Outriggers:		
BP-120	10' no bracket, no handle	38 lbs

***Shipped via truck freight only**

10' Aluminum Alloy Check Rod

Shown: CR-120 w/ BB-RK & BB-SBHDL-72

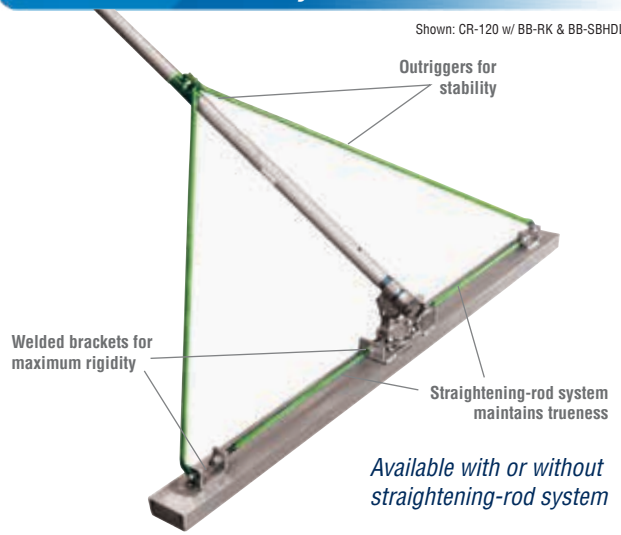

- 10' x 1-3/4" x 4" extruded straight edge
- Handles (see page 27) and brackets (page 28) sold separately
- Available with or without outriggers and straightening-rod system

Part #	Description	Weight*
10' Check Rods with Straightening Rod System and Outriggers:		
CR-120	10' no bracket, no handle	38 lbs

***Shipped via truck freight only**

Bull Float / Channel Float

Shown: BF-48NB w/ BB-HSU & BF-48RNB w/ BB-RK

"We love using it. The high front/back edges allow for quick cut/fill operation. It stays flat and is light. First tool out of the truck in the morning."

Ryan Lakebrink
Lakebrink's Custom Concrete



- 7-3/4" width
- Hardware provided
- Working surface is gently rounded
- Weight may be added to make heavier
- Heat-treated aluminum alloy extrusion design
- High screed walls cut high spots and fill low spots
- Ends are bent or rounded to eliminate bull float edge marks
- Float doesn't warp in sunlight, has exceptional durability, and is lightweight
- Versatile groover accessory (part # GR-8) can easily be attached to rough cut joints (see "Easy Groover" below)
- T-Slot allows for various brackets, accessories and adjustments
- Handles (see below) and brackets (page 28) sold separately

T-SLOT

Part #	Description	Weight
Square-End Bull Float:		
BF-24-NB	24" square-end bull float, no bracket	5 lbs
BF-36-NB	36" square-end bull float, no bracket	8 lbs
BF-42-NB	42" square-end bull float, no bracket	9 lbs
BF-48-NB	48" square-end bull float, no bracket	10 lbs
BF-54-NB	54" square-end bull float, no bracket	11 lbs
BF-60-NB	60" square-end bull float, no bracket	12 lbs
BF-66-NB	66" square-end bull float, no bracket	13 lbs
BF-72-NB	72" square-end bull float, no bracket	14 lbs

Part #	Length	Weight
Round-End Bull Float:		
BF-36R-NB	36" round-end bull float, no bracket	8 lbs
BF-42R-NB	42" round-end bull float, no bracket	9 lbs
BF-48R-NB	48" round-end bull float, no bracket	10 lbs
BF-54R-NB	54" round-end bull float, no bracket	11 lbs
BF-60R-NB	60" round-end bull float, no bracket	12 lbs
BF-66R-NB	66" round-end bull float, no bracket	13 lbs
BF-72R-NB	72" round-end bull float, no bracket	14 lbs

Wide Bull Float

T-SLOT

Shown: BF-96-NB w/ BB-KH & BF-SBHDL-72

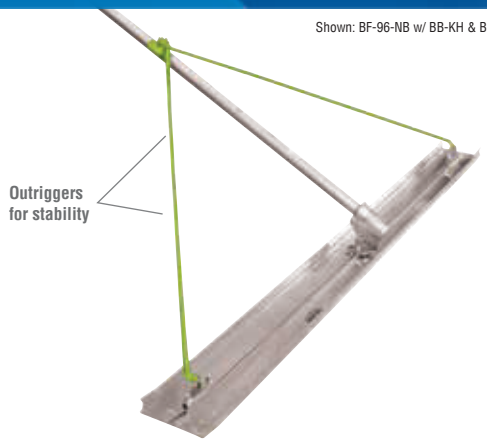

- 7-3/4" width
- Extruded aluminum for trueness, rigidity and lighter weight
- Optional straightening-rod system maintains trueness
- T-Slot allows for various brackets, accessories, and adjustments
- Raised ends prevent digging in concrete
- High wall cuts high spots and fills low spots
- Handles (see below) and brackets (page 28) sold separately

Part #	Description	Weight*
W/ Outriggers		
BF-96-ONB	96" no bracket, no handle	20 lbs
BF-120-ONB	120" no bracket, no handle	26 lbs
W/ Outriggers, Straightening-rod System		
BF-72-ST-NB	72" no bracket, no handle	20 lbs
BF-96-ST-NB	96" no bracket, no handle	26 lbs
BF-120-ST-NB	120" no bracket, no handle	32 lbs

*** Shipped via truck freight only**

Handles

Shown: BF-HDL-72 & BF-SBHDL-72



Part #	Description	Weight
1 **BF-HDL-72**	6' threaded-end aluminum handle	3 lbs
2 **BF-SBHDL-72**	6' snap-button aluminum handle (1-3/4" dia.)	3 lbs

Bracket System 1



- Threaded adjustable bracket
- Swivel bracket is non-locking
- Fits all threaded broom handles
- Items must be ordered separately

Part #	Description	Weight
WBR-AB1	Bracket w/ 5/16 x 1" bolts	1 lb
WBR-AB2	Bracket w/ 5/16 x 1-3/4" bolts	1 lb
WBR-CMHS-2	Female threaded adapter mount	1 lb

Cam-Drive Bracket



- Light-weight, heavy-duty all aluminum
- Allows multi-angle floating and capability at extremely long ranges
- Reduces back strain from bending and lifting
- Full-pitch controlled with half turn of handle
- Braking system reduces arm strain
- Fits 1-3/4" or 1-3/8" snap-button handles

Part #	Description	Weight
BB-RK	Cam-drive	3 lbs

Chain-Drive Bracket



- Chain-driven head
- Made from a nonconductive nylon composite
- Requires BF-BB-A adapter for use on Wagman bull floats

Part #	Description	Weight
WTE-5050	Chain-drive	2 lbs
BF-BB-A	Bull float adapter	2 lbs

Gear-Drive Bracket



- One-to-one turning ratio
- Completely enclosed gear-driven units keeps out concrete and is easy to clean
- Fits all Wagman bull floats and floats

Part #	Description	Weight
BB-KH	Gear-drive	5 lbs

Standard Bracket II

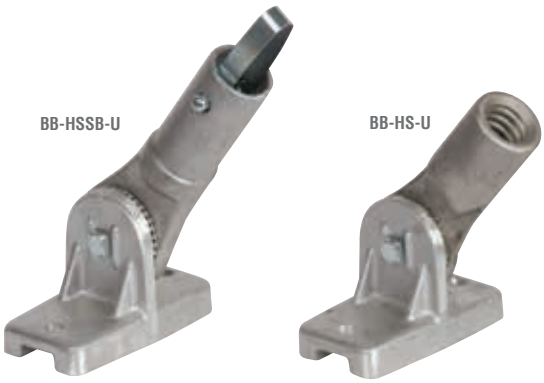

- Threaded-style socket can be used with any handle with a 1/4"-roll-thread male connector
- Snap button socket can be used with 1-3/4" or 1-3/8"-diameter snap-button handles
- Available as a complete assembly or separately as a bracket or handle socket alone
- Accepts up to 3/8 wide bolts or studs

Part #	Description	Weight
BB-HSSB-U	Snap-button style socket & base bracket	2 lbs
BB-HS-U	Threaded style socket & base bracket	2 lbs

Square End Steel Finishing Trowel

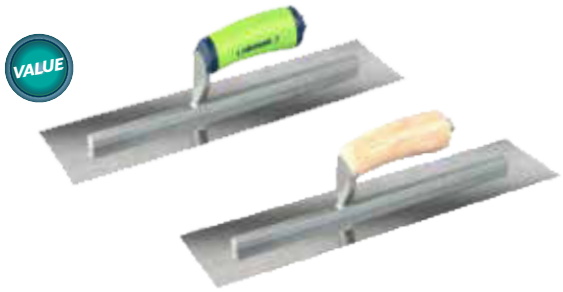

Part #	Size	Handle Type
SFT-144-SE	14" x 4"	 Ergo Fit
SFT-164-SE	16" x 4"	
SFT-184-SE	18" x 4"	
SFT-185-SE	18" x 5"	
SFT-205-SE	20" x 5"	
SFT-144-SW	14" x 4"	 Wood
SFT-164-SW	16" x 4"	
SFT-184-SW	18" x 4"	
SFT-185-SW	18" x 5"	
SFT-205-SW	20" x 5"	

Round End Steel Finishing Trowel



Part #	Size	Handle Type
SFT-103-RE	10" x 3"	 Ergo Fit
SFT-164-RE	16" x 4"	
SFT-184-RE	18" x 4"	
SFT-205-RE	20" x 5"	
SFT-103-RW	10" x 3"	 Wood
SFT-164-RW	14" x 4"	
SFT-184-RW	18" x 4"	
SFT-185-RW	20" x 5"	

Square End Magnesium Float



Part #	Size	Handle Type
MF-16318-SE	16" x 3 1/8"	 Ergo Fit
MF-18318-SE	18" x 3 1/8"	
MF-16318-SW	16" x 3 1/8"	 Wood

Stainless Steel Edger



Part #	Size	Handle Type
ES-643812-E	6" x 4" - 3/8" RAD x 1/2" LIP	 Ergo Fit
ES-641258-E	6" x 4" - 1/2" RAD x 5/8" LIP	
ES-663812-E	6" x 6" - 3/8" RAD x 1/2" LIP	
ES-661258-E	6" x 6" - 1/2" RAD x 5/8" LIP	

Bronze Groover



Part #	Size	Handle Type
GB-6451238-W	6" x 4 1/2" BIT 1/2" x 3/8"	 Wood
GB-6451238-W	6" x 4 1/2" BIT 3/4" x 3/8"	
GB-6453478-W	6" x 4 1/2" BIT 3/4" x 7/8"	
GB-6455858-W	6" x 4 1/2" BIT 5/8" x 5/8"	
GB-645112-W	6" x 4 1/2" BIT 1" x 1/2"	

Magnesium Bull Float



Part #	Size	Description
BFM-48-NB	48" x 8"	Round End, No Bracket
BFM-48-SB	48" x 8"	Square End, No Bracket

Knee Board



- Made from heavy-gauge corrosion-resistant stainless steel that cleans easily and resists concrete accumulation
- Custom contoured edge slides across concrete without marring or gouging the surface
- Designed to be nested for easy storage

Part #	Size	Weight
WKB-1	27-1/2" x 8"	16 lbs

Knee Board with Cushion



- Made from heavy-gauge corrosion-resistant stainless steel that cleans easily and resists concrete accumulation
- Custom contoured edge slides across concrete without marring or gouging the surface
- Designed to be nested for easy storage

Part #	Weight
WKB-2	12.5 lbs

Cushioned Kneeling Board

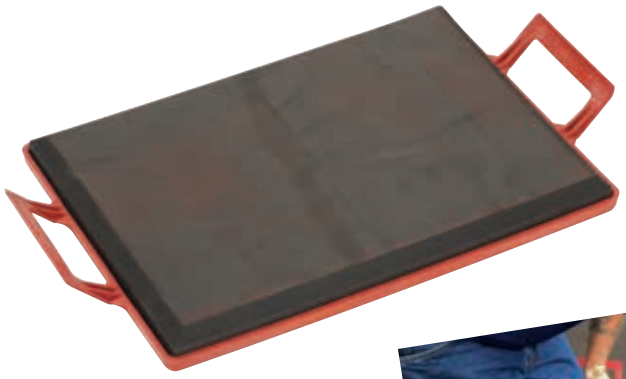

- 1-1/2"-thick padding reduces knee and lower back pain
- 19" length x 13-1/2" width

Part #	Size	Weight
WKB-05	19" x 13-1/2"	4 lbs



Broom Trolley



- Broom finish wide slabs with two people
- Adjustable broom angle and sturdy steel construction
- 50' of rope on each side

Part #	Broom Type	Weight
WBR-30-HHFA	Trolley w/ 36" poly-fiber WBR-36C	20 lbs
WBR-30	Trolley w/ no brooms	15 lbs

Wood-back Finishing Broom



- Heavy-duty hardwood blocks filled with 3-1/4" stiff poly bristles
- Accepts 3/4" Acme threaded handle (standard broom handle)
- 1" thick wood block
- Handle (see page 32) and brackets (page 28) sold separately
- WBR-AB2 recommended bracket

Part #	Size	Weight
WBR-18C	18"	2 lbs
WBR-24C	24"	2 lbs
WBR-36C	36"	3 lbs
WBR-48C	48"	4 lbs

Horsehair Wood-back Finishing Broom



- Heavy-duty hardwood blocks filled with 2-1/2" horsehair bristles
- Accepts 3/4" Acme threaded handle (standard broom handle)
- 1" thick wood block
- Handle (see page 32) and brackets (page 28) sold separately
- WBR-AB2 recommended bracket

Part #	Description	Weight
WFB-36HHF	36" horsehair broom	4 lbs

Aluminum-back Broom



- Soft-backed poly fibers set in sturdy aluminum broom head
- Unaffected by moisture
- Lightweight 36" broom only 30 oz.
- Handle (see page 32) and brackets (page 28) sold separately
- WBR-AB1 recommended bracket

Part #	Size	Weight
WBR-36C-AL	36"	2 lbs
WBR-48C-AL	48"	2 lbs

Broom Handles



Wood Handle

- Wood handle is 1-5/16" x 5' clear lacquered with 3/4" acme threaded tip

Part #	Description	Weight
WHDL-10-MT	Wood handle	2 lbs

Texture Combs



- Durable texturing tool designed to produce a uniform rough-groove finish and provide a nonskid surface
- Aluminum block holds tempered 1/8" spring-steel flat-wire tines
- Tine spacing measured center to center
- Handles (see below) and brackets (see page 28) not included, sold separately
- WBR-AB2 recommended bracket

Part #	Description	Weight
WTC-36-5	36" texture comb with 1/2" spacing	5 lbs
WTC-48-5	48" texture comb with 1/2" spacing	6 lbs
WTC-36-7	36" texture comb with 3/4" spacing	5 lbs
WTC-48-7	48" texture comb with 3/4" spacing	6 lbs
WTC-RT	1/8" texture comb replacement tine	1 lb

Neoprene Floor Squeegees

WFS-36A



- Integrated steel scraper on frame
- Rigid Neoprene blade – ideal for exposure to petroleum based liquids
- Long lasting Neoprene rubber encased in a heavy duty steel frame
- Heavy duty cast aluminum socket
- Handles (see below) sold separately

Part #	Description	Weight
WFS-24A	24" squeegee with bent ends	5 lbs
WFS-36A	36" squeegee with bent ends	6 lbs

ProDry™ Foam Floor Squeegees

ProDry™

Exclusive triple blade design!



WFS-F24-G



WFS-F30-G



WFS-F36-G



WFS-F30-CG

- Red Neoprene center blade increases longevity of outer blades while providing additional support to push heavy material such as slurry
- High density, closed cell outer foam blades are designed or maximum resistance to wear and abrasion
- Premium foam blade material is impervious to air, water, and dust
- Highly visible fluorescent green powder coated frames
- Heavy duty cast aluminum socket
- FDA approved
- Non-marking
- American-made
- Handles (see below) sold separately

Part #	Description	Weight
Straight Squeegees		
WFS-F24-G	ProDry 24" triple blade squeegees	3 lbs
WFS-F30-G	ProDry 30" triple blade squeegees	3 lbs
WFS-F36-G	ProDry 36" triple blade squeegees	3 lbs
Curved Squeegee		
WFS-F30-CG	ProDry 30" triple blade squeegee, curved	3 lbs



WFS-HDL-54F



WFS-HDL-60F



WFS-HDL-72F

ECO COAT Release* Agent

Keep your equipment looking brand new with our industrial non-stick product



A water soluble release agent that deposits a very thin film, causing surface to become virtually nonstick.

The more concentrate that you add, the more reactive Eco Coat will be. Using a clean spray container, add Eco Coat and water to achieve recommended ratio for each application. Adding Eco Coat to water and then adding more water will eliminate the need for mixing. Do NOT mix with diesel, fuels, or oils. Do NOT mix with other release agents. Eco Coat can be applied at any time. For best results, the application surface should be clean prior to use. Remove all other release agents before applying.

PART #	DESCRIPTION	WEIGHT
WPCS-30174	1-1 gallon ready-to-use 1:11 with trigger sprayer	9 lbs
WPCS-30800	1-32oz bottle concentrate	3 lbs
WPCS-30201	1-1 gallon bottle concentrate	8 lbs
WPCS-30300	1-5 gallon pail concentrate	39 lbs
WPCS-30400	1-55 gallon drum concentrate	450 lbs
WPCS-30500	1-275 gallon tote concentrate	2200 lbs

3 Easy Steps to Protect Your Investment:

1. Simply mix the concentrate with water
2. Spray it on your equipment
3. After use, power wash equipment clean



ECO CRETE Concrete* Remover

Restore tools and equipment by removing built-up, hardened concrete

2 Easy Steps to Remove Hardened Concrete:

1. For the softening of dry hardened concrete to enable easier removal
2. Spray it on, watch it foam, and break down the concrete

ECO CRETE is packaged ready to use and works best when applied to dry, hardened concrete. Spray or brush ECO CRETE onto the concrete to be removed. Be sure to protect surrounding concrete floors. The product will continue to work even after the foaming action has stopped.

Coverage:

Approximately 3 gallons of Eco Crete are required to clean the rear exterior of a ready-mix truck, assuming average depth of built-up concrete is 1/2" (13mm).

PART #	DESCRIPTION	WEIGHT
WPCS-32211	1-1 gallon bottle with trigger sprayer	8 lbs
WPCS-32310	1-5 gallon pail	45 lbs
WPCS-32410	1-55 gallon drum	508 lbs
WPCS-32510	1-275 gallon tote	2525 lbs

Application:

***Simple to Use, Eco-Friendly, Water Soluble**

Power Trowels - Spray down the whole trowel (engine & all). Promotes easy cleanup & maintenance. 11 parts water to 1 part ECO COAT.
Rental Equipment - Use ECO COAT to inhibit rust on equipment that is stored outside. It will also keep most paints from sticking to scissor lifts, etc. It will also keep concrete & mud from sticking to equipment, saving money in cleanup time. 11 parts water to 1 part ECO COAT.
Ready-Mix Trucks - Spray the whole truck down as needed/after every wash. In morning, load up at the batch plant. Drive to the job site & unload truck, rinse off the chute & drive back to plant. Reapply ECO COAT to the chute & hopper, & reload. Detailed instructions are available. ECO COAT may be used as a polished to shine cab. 11 parts water to 1 part ECO COAT.
Concrete Forms - Wood, aluminum, plastic, etc. Make sure to clean or castoff as much of the old release as possible to eliminate any reaction between ECO COAT & old form release. Do NOT switch back & forth between ECO COAT & other release agents. If forms are new, season them just as you would with oil. 11 parts water to 1 part ECO COAT for porous surfaces & 15 to 1 for nonporous surfaces.
Hand Tools - Spray on regularly to inhibit rust & to keep in like-new condition. 11 parts water to 1 part ECO COAT.
Tilt Up - Please call for a tilt-up instruction sheet.
Pre-Cast - Call for specialized attention due to many variables in precast industry. Typically, wood forms should be sprayed with an 11 parts water to 1 part ECO COAT mixture, & aluminum, plastic & steel should be sprayed with 15 to 1 mixture.

Wagman G3 Chemicals



The Wagman G3 Complete Concrete Floor System is the first and only complete solution designed for finished exposed concrete flooring.

Using nano-infused cement technology and patented refining equipment, the Wagman G3 Complete Concrete Floor System allows your polished concrete floor to be installed 80% faster than current construction methods. The Wagman G3 Complete Concrete Floor System encompasses pre-construction planning, concrete placement and finishing, floor polishing, protection, and maintenance for the life of the space.

- **5 Gallon, 45lbs**
- **All Custom Sizes Available on Request, Ask for Quote**

Technical and Safety Data Sheets available on our website

Chemicals/Part #	Description of Use	
 **Admix 7** *G3-A7* 4.8 lbs.	▸ *Increases early and cured strength* ▸ *Accelerates polished concrete timelines* ▸ *Increases abrasion resistant* ▸ *Decreases permeability*	▸ *Water-based, easy to use formula* ▸ *Eliminates curing agents* ▸ *Complete slab densification* ▸ *Increases workability*
 **Cutting Fluid** *G3-CF* 6.1 lbs.	▸ *Densifies the surface* ▸ *Increases and speeds up refinement*	▸ *Reduces permeability* ▸ *Reduces grinding labor*
 **Finishing Aid** *G3-FA* 4.6 lbs.	▸ *Meant to be finished into concrete* ▸ *Decrease water/cement ratio of surface* ▸ *Apply immediately after screeding*	▸ *Use as needed for finishing aid in trowels and other finishing operations*
 **Nano Densifier** *G3-ND* 4.7 lbs.	▸ *Maximum penetrating formular* ▸ *Forms a permanent bond* ▸ *Combats alkai-silica-reaction* ▸ *Increases surface abrasion*	▸ *Decreases permeability* ▸ VOC-compliant ▸ *Simple application* ▸ *No rinse needed*
 **Ultimate Seal** *G3-SP* 4.8 lbs.	▸ *Penetrating sealer* ▸ *Sits sub-surface to resist oil and water*	▸ *Ultimate protection*
 **Lithium Guard** *G3-TS* 6.1 lbs.	▸ *Film forming guard product* ▸ *For use in area where food is present*	▸ *Contains lithium to promote a bond to concrete*
 **Heavy Cleaner** *G3-HC* 4.6 lbs.	▸ *Deep cleaning action removes stubborn stains and ground in dirt* ▸ *Heavy degreasing formula*	▸ *Great for cleaning slurry off of concrete* ▸ *Safe on any water-safe hard surface* ▸ *Increases sealer efficacy*
 **Light Cleaner** *G3-LC* 4.7 lbs.	▸ *Designed for regular use in auto scrubbers or mop applications* ▸ *No soap formular*	▸ *Doesn't leave a film* ▸ *Helps maintain slip coefficients* ▸ *Anti-static and anti-dust*



G3 Finish Aid - 1 Quart Bottles

G3-FA Quart

The same great G3 Finish Aid, now in a smaller size! Order in single quarts or as a box of 4.

COMPETITION

FILM EVAPORATOR RETARDER

VS

SINCE 1963 WAGMAN

COLLOIDAL SILICA FINISHING AID

FILM RETARDERS

A film on the surface of the concrete to retard evaporation.



SINCE 1963 WAGMAN G3

Colloidal silica-based topical additive making concrete finishing easier/faster.

MOLECULE SIZE COMPARISON

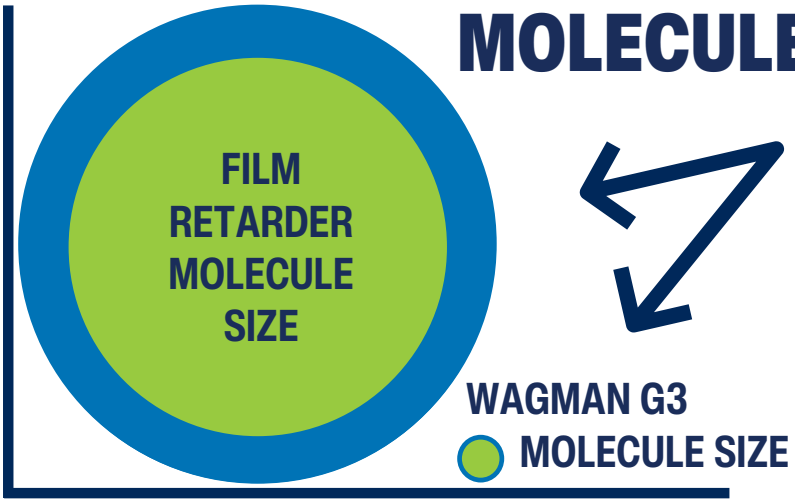

SEE THE DIFFERENCE

- Retarder molecules are much larger than the Wagman G3 molecules.
- G3 molecules penetrate deeper increasing concrete density.
- The Wagman G3 process speeds up concrete finishing by as much as 80%.

FILM RETARDER

The larger molecule size prevents the retarder from penetrating to deeper layers of concrete.

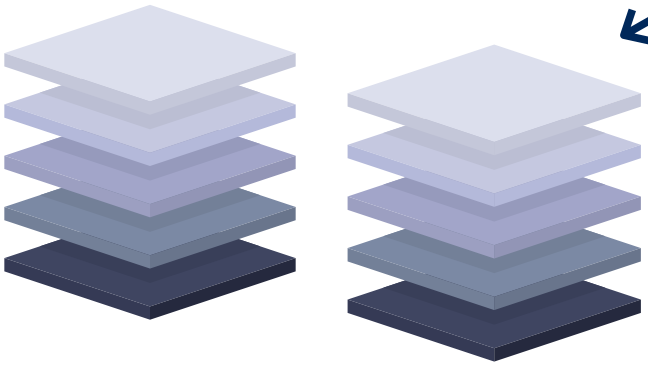

SINCE 1963 WAGMAN

G3 CHEMICALS

The smaller molecule size of G3 Chemicals allows them to penetrate to the deepest layers of concrete.

WAGMAN.US

SINCE 1963 WAGMAN

Revolution GHP

Air Scraper Blades



WASB-10



WASB-20

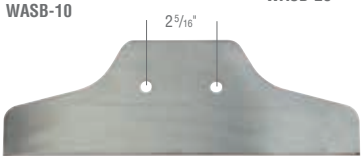

WASB-30

- Made from our ASW80 CR2 Torque-Flex™ alloy tool steel
- Made to fit EDCO, MacDonald, Continental, Trewlany and other air scrapers
- All blades have 3/8" diameter holes spaced 2-5/16" center to center

Part #	Description	Weight
WASB-10	3-13/16" cutting edge x 4" x .042 thick	1 lb
WASB-20	7-13/16" cutting edge x 4" x .062 thick	1 lb
WASB-30	11-13/16" cutting edge x 4" x .062 thick	1 lb

Floor Scraper Blades


16" x 3"


10" x 3"


10" x 3" ES


7" x 3"


Universal hole and slot mount fits most machines


.062 thick heat-treated blades have a high-carbon content making them much more resistant to breaking.

- For stripping carpet or tile from concrete or wood floors
- These sharp, high-carbon blades are made to stand up to the demands of the rental market

Part #	Description	Thickness	Application	Weight
16X3	16" L x 3" H	.062	Carpet, floor accumulations	13.5 oz
10X3	10" L x 3" H	.062	General purpose blade	8.5 oz
7X3	7 3/8" L x 3" H	.062	General purpose blade	6.3 oz
10X3ES	10" L x 3" H	.062	General purpose blade	8.5 oz

Floor Scraper Blades


6" x 5"


6" x 4"

- Now available with reversible cutting edge! Two blades in one
- These sharp, high-carbon steel blades are made to stand up to the demands of the rental market

Part #	Description	Thickness	Application	Weight
Single Cutting Edge:				
6X5	6" L x 5" H	.062	Wood floor blade	8.5 oz
6X4	6" L x 4" H	.062	Concrete floor blade	7 oz
Reversible Cutting Edge:				
6X5 DE	6" L x 5" H	.062	Wood floor blade	8.5 oz
6X4 DE	6" L x 4" H	.062	Concrete floor blade	7 oz

Replacement Blades



Kango-style
.062 or .074 thick



New style
.074 thick



Old style
.074 thick



Makinex-style
.062 thick



Milwaukee-style
.062 thick

- Replacement scraper blades for the demolition floor-cleaning tool
- Made from the same high-carbon steel as our trowel blades
- .062-thick blade offers more flex for lifting and removing stubborn materials
- .074-thick blade is used for hard-impact removal applications
- Match holes to fit floor scraper attachment for Bosch, Dewalt, Hilti, Hitachi, Makita, Milwaukee, and more
- Custom Sizes available upon request

Part #	Thickness	Description	Weight
WSC-062-KRB	.062	Replaces Kango pt. # 9170-0898-50	2 lbs
WSC-074-KRB	.074	Replaces Kango pt. # 9170-0898-60	2 lbs
WSB-67074SH	.074	New Style	2 lbs
WSB-66754SH	.074	Old Style	2 lbs
WSB-619587KRB	.062		2 lbs
WSB-671062SH	.062		2 lbs



SCRAPER BLADES



PN# WSB410092S



PN# WSB410092SN



PN# WSB410092SSD

WALK-BEHIND SCRAPER BLADES

Fits Machines: Blastrac, Crain, General Equipment, MK Diamond, Makinex, National, Palmer, Sinclair, Taylor, Wolff

Thickness	Length	Width	Notching	Self-Dicing
.062	6", 7", 8", 10", 12", 16"	3", 4", 5"	Available	Available
.092	6", 7", 8", 10", 12", 16"	3", 4", 5"	Available	Available

*Other sizes available. Call 1-800-233-9461

RIDE-ON MACHINE SCRAPER BLADES

Fits Machines: Bartell, Blastpro, Blastrac, Innovatec, National

Thickness	Length	Width	Notching	Self-Dicing
.062	6", 8", 10", 12", 14"	3", 4"	Available	Available
.092	6", 8", 10", 12", 14"	3", 4"	Available	Available

*Other sizes available. Call 1-800-233-9461

ROTARY SCRAPER Handheld

Manufacturer	Manufacturer Blade Part #	Wagman Part #
Hilti	2079722	WSB66754SH
Makita	T02602	WSB619587KRB
Milwaukee	TSH-B	WSB671062SH
Bosch	248-62-1	WSB66754SH
Dewalt	2610992179	WSB67074SH
Hitachi	DWA5841	WSB67074SH
	728823	

WAGMAN.US

Scrapers



WSC-4HDL WSC-514SH WSC-514THD WSC-514

- Used as a walk-behind scraper for general cleanup of miscellaneous debris
- J-Handle design helps eliminate back strain

Part #	Description	Length	Weight
WSC-4HDL	Straight wood dowel handle with 4" rigid blade	58"	5 lbs
WSC-514SH	Straight handle with 14" flexible blade	56"	8 lbs
WSC-514HDSH	Straight handle with 14" rigid blade	56"	9 lbs
WSC-514T	T handle with 14" flexible blade	57"	8 lbs
WSC-514THD	T handle with 14" rigid blade	57"	9 lbs
WSC-514	J handle with 14" flexible blade	56"	8 lbs
WSC-514HD	J handle with 14" rigid blade	56"	9 lbs

Choppers



WSC-7HDSH WSC-7HD WSC-10HDSH WSC-10HD

- Intended for heavy-duty chopping, scraping and cleanup of concrete forms, plus debris and ice chopping
- Main shaft is made from heavy wall pipe with a special reinforcing tang incorporated into a 1/4"-steel blade-mounting plate

Part #	Description	Length	Weight
WSC-7HDSH	Straight handle with 7" rigid sharp blade	60"	9 lbs
WSC-7HD	T handle with 7" rigid sharp blade	61"	9 lbs
WSC-10HDSH	Straight handle with 10" rigid sharp blade	60"	9 lbs
WSC-10HD	T handle with 10" rigid sharp blade	61"	9 lbs

Replacement Scraper Blades

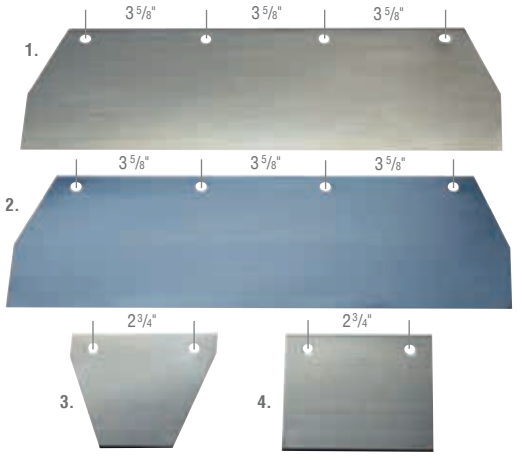

- Made using ASW 80 CR2 Tourque-flex tool steel for maximum performance
- Holes 5/16" diameter

Part #	Description	Weight
1 **WSC-514HDRB**	14" x 5" heavy duty rigid blade	3 lbs
2 **WSC-514RB**	14" x 5" blue-steel flexible blade	2 lbs
3 **WSC-2RB**	2" x 4" sharp blade	1 lb
4 **WSC-4HDLRB**	4" x 4" sharp blade	2 lbs

Replacement Chopper Blades

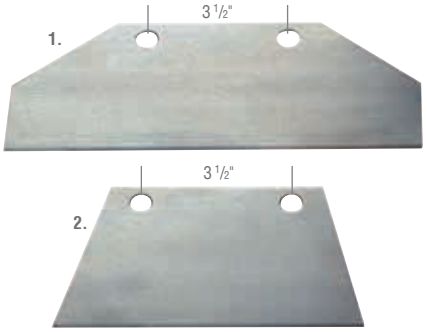

- Made using ASW 80 CR2 Tourque-flex tool steel for maximum performance
- Made to withstand intense chopping and scraping
- Holes 9/16" diameter

Part #	Description	Weight
1 **WSC-10RB**	10" x 4" rigid sharp blade	2 lbs
2 **WSC-7RB**	7" x 4" rigid sharp blade	2 lbs

Wagman Dual Pro Pump

Includes Both AC and DC Styles!



The Wagman Dual Pro Pump is a full-featured, easy-to-use power sprayer, designed for the construction industry.

Designed to replace standard pump-up or gas-driven sprayers, the Pro Pump will reduce the time needed for most spray-on applications.

The Wagman Dual Pro Pump reduces contamination and spillage by dispensing products directly from their packaging.

Designed to spray cleaners, concrete sealers, form oils and other relase agents, fertilizers, stains, herbicides, pesticides, curing compounds (including white-wax cures and other high-solid products) and deck sealers, stains, and cleaners.

- **Shipped fully-assembled**
- **Durable all-steel construction**
- **Open-flow quick-connect fitting allows for circulation, purging excess contents out of the unit for easy cleaning**
- **Circuit breaker protects operator and eliminates searching for replacement fuses**
- **Sprays 3600 sq. ft. in about 5 minutes at approximately 75 psi**

INCLUDES:

- **100' of 3/8" chemical-resistant hose on reel**
- **Heavy-duty Brass Want**
- **3 Tips: 0.5 gpm fan tip, 1.0 gpm fan tip, and adjustable brass cone nozzle**

Part #	Description	Weight
WPCS-00400	AC/DC - Dual Pro Pump power sprayer	46 lbs

Note: DC connects to a 12V battery, AC plugs into grounded outlet

WARNING: Not to be used with or near flammable liquids

TIP For spraying acids, replace brass control gun, wands and tips with Poly

Pumps ship small parcel



"The Wagman Pro Pump dispenses much more volume faster than a hand sprayer, plus I can work with a 55 gallon drum instead of a 5-gallon bucket, so it's much more efficient".

Ron Spaulding, *T & T Construction*

Wagman Dual Express Pro Pump

Includes Both AC and DC Styles!



With the power of the original Dual Pro Pump Power Spraying System, The Dual Express Pro Pump is a compact, easily mountable sprayer that will spray from any container including 1, 5, 55 or 275 gallon sizes.

The entire unit weighs 18lbs, has multiple suction hose ports, and 4 standard-size bolt holes giving you the flexibility to take and mount the sprayer in tight spaces or to anything from walls, dollies, trucks, equipment and more.

- **Shipped fully-assembled**
- **Durable all-steel construction**
- **Open-flow quick-connect fitting allows for circulation, purging excess contents out of the unit for easy cleaning**
- **Circuit breaker protects operator and eliminates searching for replacement fuses**
- **Sprays 3600 sq. ft. in about 5 minutes at approximately 75 psi**

INCLUDES:

- **25' of 3/8" chemical-resistant hose**
- **Brass spray control gun with quick connect fittings**
- **2 Solid Brass Wand Extensions**
- **2 Brass Spray Tips**

Part #	Description	Weight
WPCS-03400	AC/DC - Dual Express Pro Pump power sprayer	18 lbs

Note: DC connects to a 12V battery, AC plugs into grounded outlet

WARNING: Not to be used with or near flammable liquids

TIP For spraying acids, replace brass control gun, wands and tips with Poly

Pumps ship small parcel

NEW! VX BLADES & MATADOR PANS FROM WAGMAN

The VX Series blades and Matador pans were developed by Wagman using our decades of experience. You get the same high quality materials, made by the same craftsmen, in York, PA at a lower price point.



VX BLADES

AVAILABLE IN THE SIZES:
VX614, VX618, VX8140, VX8180

CONTACT US! email@wagman.us
(717) 854-4540

WAGMAN.US

To order by email: email@Wagman.us

TERMS & CONDITIONS FOR ORDERING

***Wagman Metal Products Inc.**, appreciates the opportunity to fulfill your order.*
Please review the terms and conditions prior to placing your order.
*If you have any questions, please call **717-854-2120** or email, **email@Wagman.us**.*

NOTES

Since 1963
WAGMAN.US

MARKET LEADING INNOVATION FOR OVER 60 YEARS



400 South Albemarle Street • York, PA 17403-2514
PH 717.854.2120 • SALES 800.233.9461 • FAX 717.854.4540
EMAIL email@Wagman.us • www.Wagman.us

© Wagman Metal Products Inc. 2024